

Surface Mount RF Transformer

ADT1-1WT-1+ ADT1-1WT-1

75Ω 1 to 400 MHz




Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	250mW
DC Current	30mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

PRIMARY DOT	3
PRIMARY	1
SECONDARY DOT	4
SECONDARY	6
SECONDARY CT	5
NOT USED	2

Outline Drawing

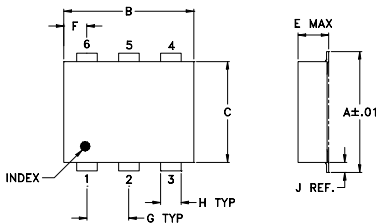

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L			wt
.030	.026	.065	.300			grams
0.76	0.66	1.65	7.62			0.20

Demo Board MCL P/N: TB-430

Config. A



Features

- 1dB bandwidth covers entire frequency range
- good return loss, 21 dB typ.
- leaded surface mount
- aqueous washable
- protected under US patent 6,133,525

Applications

- high speed data communications
- baluns

CASE STYLE: CD542
PRICE: \$4.95 ea. QTY (100-249)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Transformer Electrical Specifications

Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*	PHASE UNBALANCE (Deg.) Typ.	AMPLITUDE UNBALANCE (dB) Typ.	RETURN LOSS** (dB)	
					1 dB MHz	1 dB bandwidth
1	1-400	1-400	1 dB bandwidth	1 dB bandwidth	21	16


* Insertion Loss is referenced to mid-band loss, 0.5 dB typ.

** Return loss specified from 1 to 250 MHz


Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
1.00	0.56	22.65	0.05	0.28
2.00	0.47	25.12	0.03	0.16
4.00	0.40	27.64	0.02	0.08
6.00	0.37	28.83	0.02	0.03
8.00	0.36	29.44	0.01	0.02
10.00	0.37	29.80	0.01	0.01
20.00	0.39	30.47	0.01	0.29
40.00	0.41	30.27	0.00	0.56
60.00	0.44	29.55	0.02	0.83
80.00	0.45	28.73	0.03	1.18
100.00	0.47	27.78	0.07	1.44
125.00	0.50	26.57	0.11	1.84
150.00	0.53	25.39	0.17	2.23
175.00	0.54	24.26	0.22	2.63
200.00	0.56	23.23	0.29	3.04
225.00	0.60	22.30	0.37	3.40
250.00	0.62	21.50	0.45	3.72
275.00	0.66	20.78	0.54	4.20
300.00	0.68	20.11	0.65	4.57
325.00	0.74	19.48	0.76	4.98
350.00	0.77	18.81	0.87	5.34
375.00	0.82	18.16	1.01	5.66
400.00	0.89	17.52	1.16	5.96

ADT1-1WT-1
INSERTION LOSS

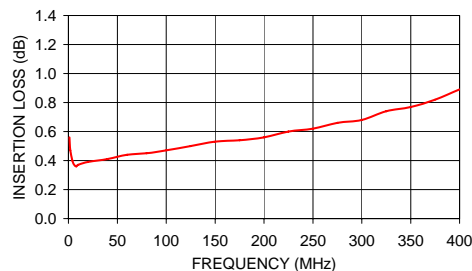

ADT1-1WT-1
INPUT RETURN LOSS

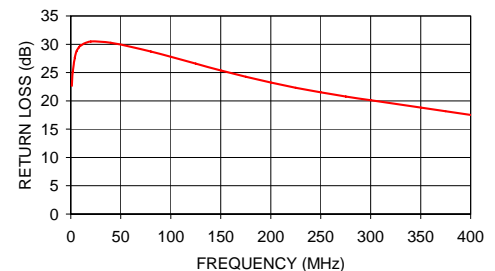

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M112648
ADT1-1WT-1
ED-8696/1
IG/FL/CP/AM
090220