

# Surface Mount High Reliability Mixer

## ADEX-R10+

### Level 7 (LO Power +7 dBm) 10 to 1000 MHz



CASE STYLE: CD542  
PRICE: \$3.35 ea. QTY. (10-49)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

#### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Permanent damage may occur if any of these limits are exceeded.

#### Pin Connections

LO	6
RF	3
IF	2
GROUND	1,4,5

#### Features

- hermetically sealed ceramic quad
- low conversion loss, 7.0 dB typ.
- excellent L-R isolation, 60 dB typ.
- flat conversion loss, ±0.2 dB typ. over entire band
- good VSWR, 2:1 typ. for LO, 1.3:1 typ. for RF, 1.2:1 typ. for IF
- good performance to 1500 MHz
- low profile package
- aqueous washable
- protected by US Patent 6,133,525 and 6,947,717

#### Applications

- cellular

#### Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)						
		L	M	U	L	M	U							
10-1000	DC-800	70	55	60	40	47	37	40	26	33	20	26	13	16


1 dB COMP.: +1 dBm typ.

L = low range [ $f_L$  to  $10 f_L$ ] M = mid range [ $10 f_L$  to  $f_U/2$ ] U = upper range [ $f_U/2$  to  $f_U$ ]  
m = mid band [ $2f_L$  to  $f_U/2$ ]


#### Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)	
						RF
10.10	40.10	6.25	64.76	56.08	1.29	2.06
70.10	100.10	6.59	67.01	40.99	1.39	1.75
130.10	160.10	6.64	67.47	36.34	1.33	1.84
190.10	220.10	6.53	71.13	34.52	1.37	1.78
250.10	280.10	6.67	76.47	33.57	1.38	1.80
310.10	340.10	6.60	65.84	32.17	1.37	1.86
370.10	400.10	6.59	60.70	31.37	1.40	1.87
430.10	460.10	6.55	54.79	29.87	1.39	1.91
490.10	520.10	6.57	53.46	29.02	1.38	1.98
550.10	580.10	6.65	53.03	27.88	1.37	2.01
610.10	640.10	6.58	50.93	26.59	1.34	2.06
670.10	700.10	6.50	47.52	25.33	1.36	2.11
730.10	760.10	6.67	45.16	24.43	1.35	2.15
790.10	820.10	6.74	44.18	23.85	1.31	2.26
850.10	880.10	6.85	45.23	23.02	1.28	2.29
910.10	940.10	6.87	47.66	22.46	1.19	2.32
970.10	1000.10	6.48	50.13	21.53	1.10	2.35
1030.10	1060.10	6.27	55.18	19.99	1.02	2.32
1090.10	1120.10	6.14	53.76	18.95	1.15	2.43
1150.10	1180.10	6.10	47.59	18.31	1.26	2.49

#### Outline Drawing

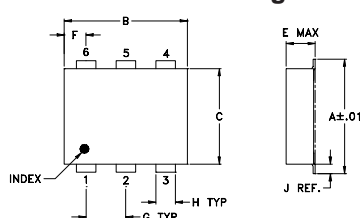

#### PCB Land Pattern




Suggested Layout, Tolerance to be within ±.002

#### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.20		

#### Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)

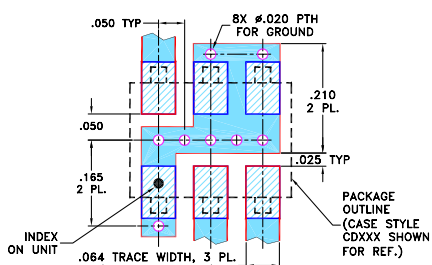

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

**Mini-Circuits**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED



For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. OR  
M109914  
ADEX-R10+  
ED-12872/4  
WL/TD/CP  
090918  
Page 1 of 2

#### Electrical Schematic

