

Ceramic

Frequency Mixer WIDE BAND

MCA1-85L+

Level 4 (LO Power+4 dBm) 2800 to 8500 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50 mW
IF Current	40 mA

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9

Outline Drawing

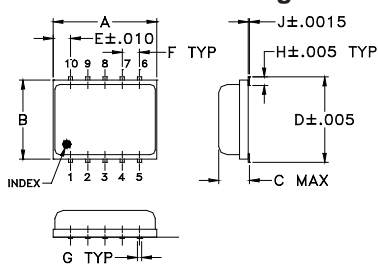

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.30	.250	.085	.266	.050	.050	.012
7.62	6.35	2.16	6.76	1.27	1.27	0.30
H	J	K	L	M	wt	
.029	.004	.085	.296	.030	grams	
0.74	0.10	2.16	7.52	0.76	0.25	

Demo Board MCL P/N: TB-144 Suggested PCB Layout (PL-045)

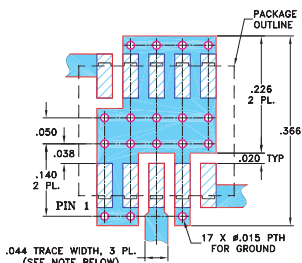

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wide bandwidth, 2800 to 8500 MHz
- high L-R isolation, 35 dB typ.
- IF, DC to 1200 MHz
- LTCC double balanced mixer
- aqueous washable
- low cost
- low profile, 0.08"
- protected by US Patent 7,027,795

Applications

- satellite up and down converters
- line of sight links
- defense radar
- defense communication



CASE STYLE: DZ885
PRICE: \$9.45 ea. QTY (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications (T_{AMB} = -55°C to 100°C)

FREQUENCY (MHz)	CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
	LO/RF f _L -f _U	IF	\bar{X} σ Max.	Typ.	Min.	Typ.	Min.	
2800-8500	DC-1200		5.7 0.2 8.4*	35	20	13	7	11
5000-5000	DC-1200		6.0 0.3 8.4*	35	20	38	20	7
5000-7500	DC-1200		7.0 0.3 —	31	—	32	—	8


1 dB COMPR. 0 dBm typ.

* Conversion loss at 30 MHz IF, increases with IF frequency.

Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)		Isolation L-R (dB)		Isolation L-I (dB)		VSWR RF Port (:1)	VSWR LO Port (:1)
	LO	RF	LO	RF	LO	RF		
2800.10	6.06	39.50	11.58	2.48	1.91			
3000.10	5.85	44.16	13.00	2.48	1.84			
3500.10	5.47	39.32	13.49	2.00	1.86			
4000.10	6.67	35.79	12.28	2.46	2.08			
4500.10	6.70	28.08	16.04	2.01	2.43			
5000.10	6.55	35.79	27.00	2.60	2.28			
5500.10	6.27	42.78	33.73	2.22	3.31			
6000.10	6.26	36.23	37.80	2.15	4.41			
6500.10	5.90	36.41	47.06	2.10	3.13			
6700.10	5.84	33.42	50.18	2.18	3.06			
6800.10	5.84	33.65	46.65	2.00	3.62			
6900.10	5.88	33.84	43.73	2.07	3.35			
7000.10	5.98	33.85	41.08	2.07	3.19			
7500.10	6.80	39.32	33.99	1.83	3.16			
7600.10	7.17	39.67	33.16	1.68	3.99			
7700.10	7.41	40.86	32.27	1.63	4.00			
7800.10	7.48	40.67	31.25	1.68	3.52			
7900.10	7.28	37.86	30.76	1.70	3.52			
8000.10	7.02	35.05	30.85	1.77	3.68			
8500.10	6.93	32.51	33.93	2.22	4.99			

Electrical Schematic

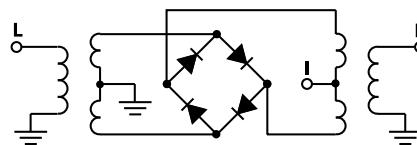

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.

REV. C
M102713
ED-11119/2
MCA1-85L+
DJ/RS/CP/AM
070423
Page 1 of 2

