

# Limiter

# RLM-33+

50Ω Broadband 30 to 3000 MHz

## The Big Deal

- Wide Frequency range 30 to 3000 MHz
- Excellent limiting beyond +12 dBm input power
- Very quick recovery time, 10 nsec
- Low insertion loss, 0.23 dB



CASE STYLE: TT1224

## Product Overview

The RLM-33+ is packaged in a miniature size (0.25 X 0.3 in.) and protects against ESD and input power surges over a frequency range 30 to 3000 MHz. Construction is on a micro strip low loss dielectric material and cased into Mini-Circuits high volume, low cost "R" package for cost efficiencies.

The RLM-33+ limiter provides excellent protection of low noise amplifiers in hostile environments where unwanted signals prevail such as in manufacturing sites, train tunnels, etc.

## Key Features

Feature	Advantages
Limiting abilities from +12 to +30 dBm	Protects against strong undesired signals and prevents burn out of amplifiers
Frequency coverage 30 to 3000 MHz	Protects against many different types of unwanted signals including ESD
Surface mount package, miniature size	Allows convenient placement in amplifiers incorporating this protective device
Low insertion loss and VSWR	Provides minimal degradation to amplifier performance, especially for low noise amplifiers where input loss is critical
Low Cost	A practical solution to incorporate into amplifier design with a minimal affect on cost



ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

# Surface Mount Limiter

50Ω Broadband 30 to 3000 MHz

## Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	2W

Permanent damage may occur if any of these limits are exceeded.

## Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6


## Outline Drawing

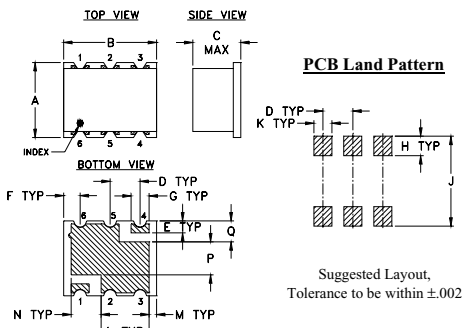

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65
J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16

## Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

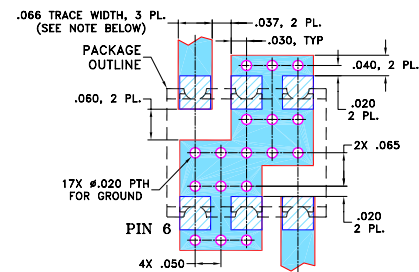

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED. 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE. 3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER) 4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- wideband, 30 to 3000 MHz
- low insertion loss 0.23 dB typ.
- fast recovery time, 10nsec typ.
- excellent VSWR 1.05:1 typ.
- low leakage power, 11.5 dBm typ.

## Applications







- military, hi-rel applications
- stabilizing generator outputs
- reducing amplitude variations
- protects low noise amplifiers and other devices from ESD or input power damage

## Electrical Specifications

Parameter	Condition	Min.	Typ.	Max.	Units
Frequency Range		30		3000	MHz
Insertion Loss in Linear Range	<+5 dBm Input	—	0.23	0.7	dB
VSWR	<+5 dBm Input	—	1.05	1.5	:1
Input Power Range	Output Power Limited	+12	—	+30	dBm
Output Power	In limiting range	—	+11.5	—	dBm
Recovery Time	1 watt pulse 50 μsec pw 1kHz duty cycle recovery to within 90% of final value.	—	10	—	nsec
Response Time	-30 to +30 dBm input 50 μsec, BW 1 kHz duty cycle	—	2	—	nsec
Limiting Δ Output/1dB Δ Input	Input Power Range (dBm)				
	12 to 20	—	0.2	—	dB/dB
	20 to 25	—	0.2	—	
	25 to 30	—	0.2	—	

## Typical Performance Data

Freq. (MHz)	I. Loss in Linear Range (dB)	VSWR in Linear Range (:1)	Power Output (dBm)				Δ Output 1dB Δ Input		
			+12dBm Input	+20dBm Input	+25 dBm Input	+30dBm Input	+12 to +20dBm Input	+20 to +25 dBm Input	+25 to +30 dBm Input
30.00	0.08	1.23	9.81	11.21	11.80	12.41	0.18	0.12	0.12
50.00	0.06	1.13	9.72	10.92	11.45	11.53	0.15	0.11	0.02
70.00	0.06	1.09	9.66	10.82	11.28	11.54	0.15	0.09	0.05
90.00	0.06	1.07	9.75	10.90	11.29	11.98	0.14	0.08	0.14
100.00	0.06	1.06	9.78	10.86	11.26	12.01	0.14	0.08	0.15
1000.00	0.22	1.05	8.36	9.48	12.01	13.78	0.14	0.51	0.35
1200.00	0.23	1.06	8.00	9.52	12.66	13.22	0.19	0.63	0.11
1600.00	0.29	1.07	7.31	10.59	12.37	11.29	0.41	0.36	-0.22
2000.00	0.32	1.07	6.62	11.44	9.71	10.77	0.60	-0.35	0.21
2200.00	0.34	1.08	6.48	10.73	8.92	11.37	0.53	-0.36	0.49
2400.00	0.39	1.11	6.66	9.78	8.08	11.49	0.39	-0.34	0.68
2600.00	0.40	1.12	7.16	8.65	7.30	11.64	0.19	-0.27	0.87
2800.00	0.41	1.13	7.57	7.25	6.87	11.76	-0.04	-0.08	0.98
3000.00	0.43	1.13	7.51	5.62	6.94	12.05	-0.24	0.26	1.02



**Mini-Circuits**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED  
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)  
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

REV. A  
M124708  
RLM-33+  
ED-13618  
DJ/CP/AM  
090930  
Page 2

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).