


# Surface Mount Bandpass Filter

## BPF-B59+

50Ω      57 to 61 MHz

### The Big Deal

- High rejection, 65dB typical
- Good VSWR, 1.6:1 typical
- Sharp insertion loss roll off
- SMT shielded case



CASE STYLE: HZ1198

### Product Overview

The BPF-B59+ is a narrow-band bandpass filter in a shielded package (size of 0.472" x 0.826" x .22") fabricated using SMT technology and offers sharp shape factor. Covering 59 MHz  $\pm$  2 MHz band width, these units offer good matching within the passband and high rejection. This unit uses a miniature high Q capacitors and wire welded inductors for high reliability. In addition it has repeatable performance across production lots and consistent performance across temperature.

### Key Features

Feature	Advantages
Narrow bandwidth filter (fractional bandwidth of 7 %)	Fast roll-off; this will attenuate frequencies closer to the passband with good rejection value of > 20 dB.
Good VSWR, 1.6:1 typical in passband	The BPF-B59+ has very good return loss for a narrow bandwidth which provides good matching when used with other devices.
More than 40dB rejection up to 2200MHz	This enables the filter to attenuate spurious signals and reject harmonics for broad band of frequency.
Shielded case	Reduced interference with and from the surrounding components.



For detailed performance specs & shopping online see web site


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

# Bandpass Filter

## BPF-B59+

50Ω 57 to 61 MHz



CASE STYLE: HZ1198  
PRICE: \$29.95 ea. QTY (1-9)

### Features

- Good VSWR, 1.6:1 typical in passband
- High rejection, 65 dB typical
- Sharp insertion loss roll off
- Shielded case
- Aqueous washable

### Applications

- Harmonic rejection
- Transmitters / receivers
- ILS / Localiser
- Radio communications

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—	—	59	—	MHz	
	Insertion Loss	F1-F2	57-61	—	3.9	5.5	dB
	VSWR	F1-F2	57-61	—	1.6	1.9	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC-52	20	33	—	dB
	VSWR	DC-F3	DC-52	—	27	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	68-2600	20	32	—	dB
	VSWR	F4-F5	68-2600	—	17	—	:1

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.08W max.

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

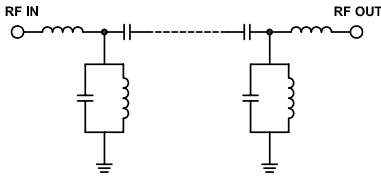

### Typical Frequency Response




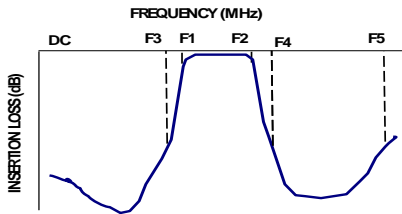


### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
0.5	84.65	11.69	57.00	175.41
15.0	78.34	17.39	57.25	171.92
49.0	49.77	86.86	57.50	166.70
52.0	34.89	48.26	57.75	160.62
53.0	28.63	31.60	58.00	154.85
54.5	17.03	11.03	58.15	152.00
55.5	8.36	3.18	58.25	150.10
56.5	4.25	1.28	58.50	146.52
57.0	3.78	1.33	58.75	144.02
59.0	3.42	1.53	58.90	143.05
61.0	3.82	1.18	59.00	142.41
62.0	5.21	1.27	59.10	142.07
63.0	10.50	3.38	59.25	141.56
64.0	17.62	6.97	59.50	141.34
68.0	37.62	22.29	59.75	142.03
72.0	49.37	36.20	60.00	143.64
100.0	85.53	91.43	60.25	146.26
500.0	80.23	434.30	60.50	149.72
1000.0	81.36	133.63	60.75	153.58
2200.0	52.21	69.49	61.00	157.15

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

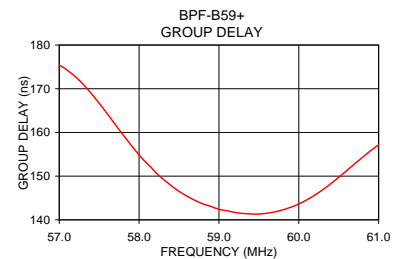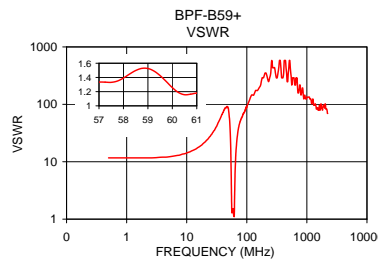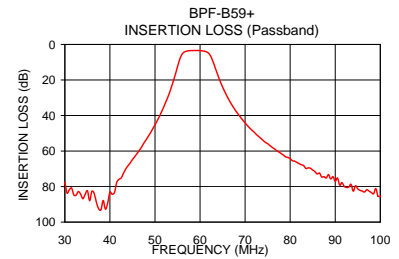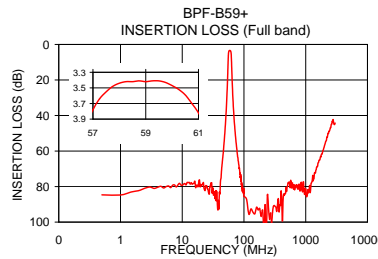

**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IFIRF MICROWAVE COMPONENTS


For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

## Pad Connections

INPUT	1
OUTPUT	2
GROUND	3,4,5,6

## Demo Board MCL P/N: TB-400 Suggested PCB Layout (PL-247)

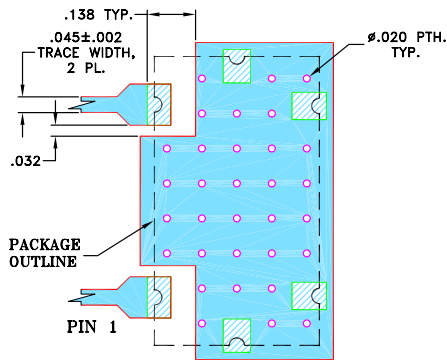


### NOTES:


- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002". COPPER: 1/2 OZ. EACH SIDE.  
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

## Outline Drawing

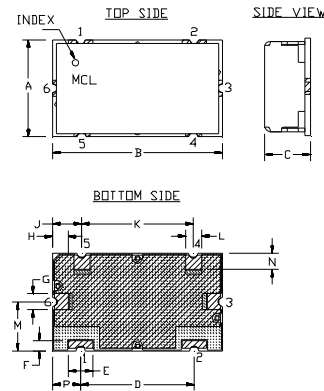

## PCB Land Pattern



## Outline Dimensions ( inch / mm)

A	B	C	D	E	F	G	H	J	K	L	M
.472	.826	.220	.551	.118	.047	.078	.076	.142	.543	.078	.236
11.99	20.98	5.59	14.00	3.00	1.19	1.98	1.93	3.61	13.79	1.98	5.99
N	P	Q	S	T	U	V	W	X	Y	wt	
.079	.138	.162	.098	.096	.217	.067	.157	.866	.512	grams	
2.01	3.51	4.11	2.49	2.44	5.51	1.70	3.99	22.00	13.00	6.0	