

**2 Way-0°    50Ω    10 to 40 GHz**

## The Big Deal

- Ultra-wideband, 10 to 40 GHz
- Low insertion loss, 0.8 dB
- High Isolation, 20 dB
- 10W power handling
- Low amplitude unbalance, 0.2 dB



CASE STYLE: UU2234

## Product Overview

Mini-Circuits' ZN2PD-K44+ is an ultra-wideband coaxial 2-way 0° splitter/combiner providing coverage from 10 to 40 GHz, supporting a wide range of applications including 5G, Ku-Band, K-Band, and Ka-Band SatCom, microwave point-to-point backhaul, instrumentation and many more. This model provides 10W power handling as a splitter and very low insertion loss across the entire operating frequency range, minimizing power dissipation and delivering excellent signal power transmission from input to output. The ZN2PD-K44+ comes housed in a rugged aluminum alloy case measuring 3.5 x 2.0 x 0.5" with 2.92mm connectors.

## Key Features

Feature	Advantages
Ultra-wideband, 10 to 40 GHz	Extremely wide frequency range supports many broadband applications in a single model.
Low insertion loss, 0.8 dB	The combination of 10W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining excellent transmission of signal power.
High isolation, 20 dB	Minimizes interference between ports.
High power handling: <ul style="list-style-type: none"><li>• 10W as a splitter</li><li>• 2W as a combiner</li></ul>	The ZN2PD-K44+ is suitable for systems with a wide range of power requirements.
Low amplitude unbalance, 0.2 dB	Produces nearly equal output signals, ideal for parallel path and multichannel systems.
DC Passing, 600mA (300mA each port)	Supports applications where DC power is needed through the RF line.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Power Splitter/Combiner

## ZN2PD-K44+

2 Way-0° 50Ω 10 to 40 GHz

### Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)*	10W max.
Internal Dissipation	0.25W max.

DC Current 600 mA (300mA for each port)  
Permanent damage may occur if any of these limits are exceeded.  
\*Assume output match of 2.0:1 or better.

### Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2



### Outline Drawing

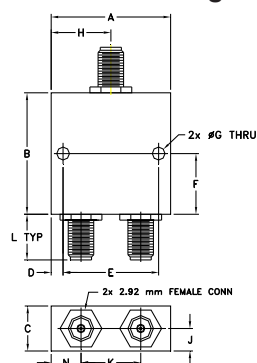

### Outline Dimensions (inch mm)

A	B	C	D	E	F	G
1.00	1.00	.370	.101	.800	.500	.106
25.40	25.40	9.40	2.57	20.32	12.70	2.69
H	J	K	L	N		wt
.500	.185	.500	.375	.25		grams
12.70	4.70	12.70	9.53	6.35		55

### Electrical Schematic

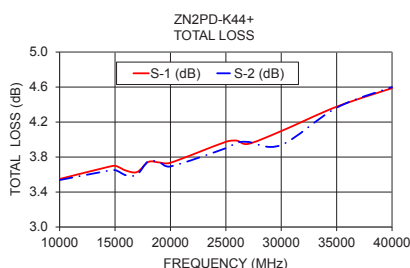

### Features

- wideband, 10 to 40 GHz
- excellent amplitude unbalance, 0.2 dB typ.
- excellent insertion loss 0.8dB typ.
- up to 10W power input as splitter

### Applications

- WIMAX
- instruments
- satellite distribution
- WLAN
- LTE
- radar

### Electrical Specifications at 25°C



Parameter	Frequency (GHz)	Min.	Typ.	Max.	Unit
Frequency Range		10		40	GHz
Insertion Loss Above 3.0 dB	10 - 18	—	0.6	1.2	dB
	18 - 26.5	—	0.9	1.8	
	26.5 - 40	—	1.0	2.0	
Isolation	10 - 40	15	20		dB
Phase Unbalance	10 - 18	—	5.0	7.0	Degree
	18 - 26.5	—	7.0	9.0	
	26.5 - 40	—	8.0	10.0	
Amplitude Unbalance	10 - 18	—	0.1	0.3	dB
	18 - 26.5	—	0.15	0.4	
	26.5 - 40	—	0.3	0.6	
VSWR (Port S) <sup>1</sup>	10 - 18	—	1.4	1.8	:1
	18 - 26.5	—	1.35	1.8	
	26.5 - 40	—	1.5	1.8	
VSWR (Port 1-2) <sup>1</sup>	10 - 18	—	1.5	1.8	:1
	18 - 26.5	—	1.4	1.8	
	26.5 - 40	—	1.5	1.8	

1. Above 37 GHz, VSWR increases to 2.0:1

### Typical Performance Data

Frequency (MHz)	Total Loss <sup>1</sup> (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
10000	3.55	3.54	0.01	19.21	0.00	1.43	1.28	1.30
14000	3.68	3.63	0.04	29.61	0.16	1.41	1.54	1.52
15000	3.70	3.65	0.05	31.61	0.09	1.31	1.56	1.54
16000	3.64	3.59	0.05	31.50	0.06	1.09	1.44	1.40
17000	3.63	3.60	0.03	28.79	0.20	1.20	1.24	1.20
18000	3.74	3.75	0.01	25.37	0.08	1.32	1.06	1.01
19000	3.74	3.74	0.00	22.59	0.21	1.23	1.14	1.11
20000	3.73	3.69	0.04	20.49	0.28	1.17	1.25	1.18
25000	3.97	3.90	0.07	17.37	0.35	1.24	1.36	1.24
26000	3.99	3.97	0.02	17.73	0.48	1.17	1.27	1.23
27000	3.95	3.97	0.02	18.32	0.13	1.13	1.08	1.16
30000	4.10	3.94	0.16	21.45	0.17	1.07	1.51	1.31
35000	4.38	4.36	0.01	25.97	0.13	1.45	1.20	1.04
40000	4.59	4.60	0.01	35.08	1.31	1.69	1.65	1.64

1. Total Loss = Insertion Loss + 3dB splitter loss.

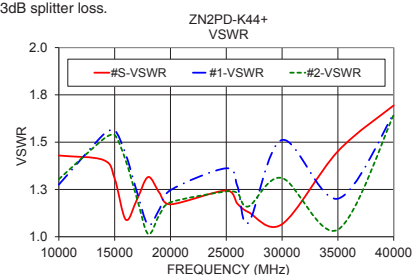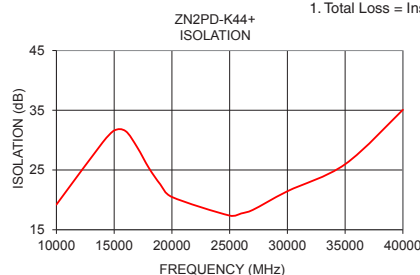

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

