

Surface Mount Directional Coupler

D171+ D171

50Ω 2300 to 2600 MHz



CASE STYLE: CA531-1
PRICE: \$ 0.99 ea. QTY (25)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	4
OUTPUT	6
COUPLED	3
GROUND	1,2,5

Features

- low mainline loss, 0.3 dB typ.
- excellent VSWR, 1.2:1 typ.
- excellent repeatability
- miniature low profile package
- aqueous washable

Applications

- WLAN
- WiMAX
- Aeronautical

Directional Coupler Electrical Specifications


FREQ. RANGE (MHz)	COUPLING (dB)	MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT ²
		Typ.	Max.	Typ.	Min.		
2300-2600	18.2±1.3	0.5	0.8	14	9	1.3	1.0

1. Mainline loss includes theoretical power loss at coupled port.
2. 4W CW when operating with a 2.0:1 maximum VSWR on all ports.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
2300.00	0.30	18.72	17.37	37.17	37.46	22.94
2400.00	0.32	18.40	17.11	35.65	36.45	22.12
2440.00	0.33	18.28	17.05	36.10	36.80	21.93
2460.00	0.33	18.23	17.08	35.73	37.51	21.74
2480.00	0.33	18.16	17.05	34.79	37.40	21.55
2500.00	0.33	18.10	16.93	34.49	36.89	21.39
2540.00	0.35	17.99	16.76	35.20	36.35	21.20
2560.00	0.35	17.94	16.81	35.68	36.80	21.06
2580.00	0.35	17.88	16.80	35.01	37.11	20.87
2600.00	0.35	17.82	16.70	34.48	36.62	20.68


Outline Drawing

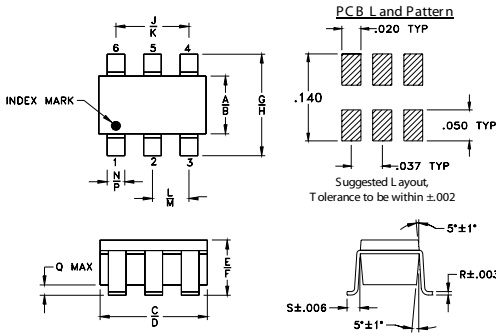

Outline Dimensions (inch mm)




A	B	C	D	E	F	G	H	J
.052	.067	.106	.122	.035	.064	.087	.118	.067
1.32	1.70	2.69	3.10	0.89	1.63	2.21	3.00	1.70
K	L	M	N	P	Q	R	S	wt
.083	.033	.042	.012	.020	.012	.006	.018	grams
2.11	0.84	1.07	0.30	0.51	0.30	0.15	0.46	0.020

Demo Board MCL P/N: TB-396+ Suggested PCB Layout (PL-270)

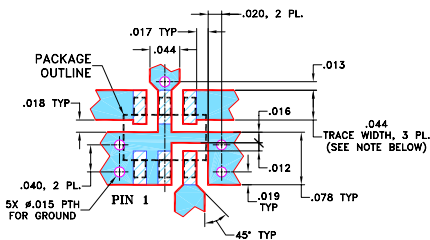


NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

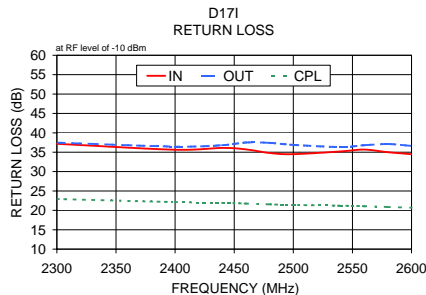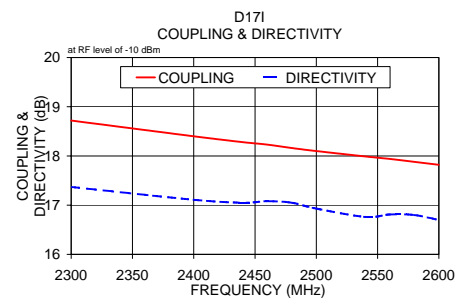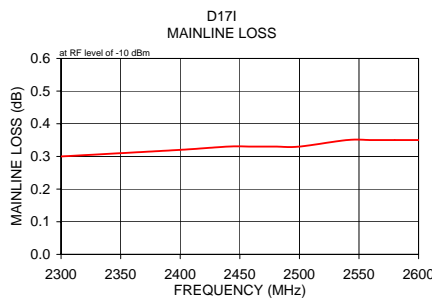

Electrical Schematic

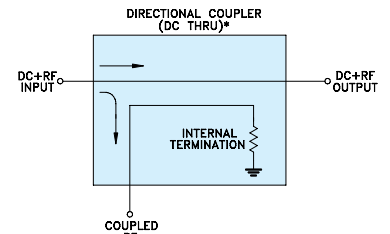

* ELECTRICAL SCHEMATIC FOR DIRECTIONAL COUPLER THAT IS DESIGNED WITHOUT INTERNAL TRANSFORMERS.

ESD Rating

Human Body Model (HBM): Class 1A (250 v to <500 v) in accordance with ANSI/ESD STM 5.1 - 2001
Machine Model (MM): Class M1 (< 100 v) in accordance with ANSI/ESD STM 5.2 - 1999 (pass 50V)

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. D
M119986
D171
JS/TD/CP/AM
090903