

Surface Mount Directional Coupler

50Ω 810 to 960 MHz

D20C+



CASE STYLE: CA531
PRICE: \$ 0.99 ea. QTY (25)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	4
OUTPUT	6
COUPLED	3
GROUND	1,2,5

Features

- low mainline loss, 0.3 dB typ.
- excellent VSWR, 1.1:1 typ.
- excellent repeatability
- miniature low profile package
- aqueous washable

Applications

- cellular
- PCS

Directional Coupler Electrical Specifications


FREQ. RANGE (MHz)	COUPLING (dB)	MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT ²
		Typ.	Max.	Typ.	Min.		
810-960	19.4±1.4	0.3	0.5	15	7	1.1	1.0

1. Mainline loss includes theoretical power loss at coupled port.
2. 4W CW when operating with a 2.0:1 maximum VSWR on all ports.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
810.00	0.21	19.88	16.85	44.95	39.39	27.31
820.00	0.21	19.78	16.81	44.68	39.07	27.28
835.00	0.21	19.63	16.77	44.25	38.78	27.23
850.00	0.21	19.48	16.77	43.54	38.90	27.18
860.00	0.22	19.38	16.77	43.31	39.11	27.16
875.00	0.22	19.23	16.77	42.82	39.62	27.12
885.00	0.22	19.14	16.79	42.66	40.18	27.11
900.00	0.23	19.00	16.78	42.05	40.70	27.08
930.00	0.24	18.73	16.74	40.89	40.57	27.02
960.00	0.24	18.47	16.69	40.28	40.62	26.90


Outline Drawing

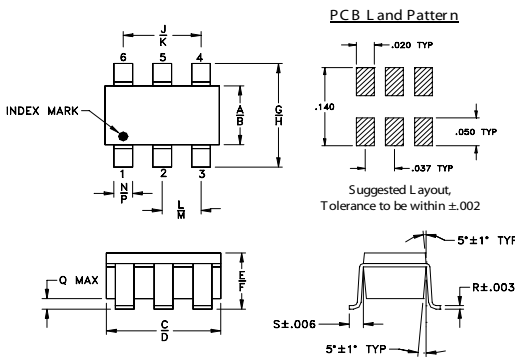




Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.052	.067	.106	.122	.035	.064	.087	.118	.067
1.32	1.70	2.69	3.10	0.89	1.63	2.21	3.00	1.70
K	L	M	N	P	Q	R	S	wt
.083	.033	.042	.012	.020	.012	.006	.018	grams
2.11	0.84	1.07	0.30	0.51	0.30	0.15	0.46	0.020


Demo Board MCL P/N: TB-396+ Suggested PCB Layout (PL-270)

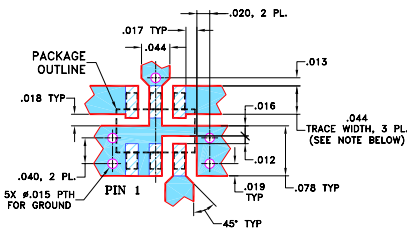

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

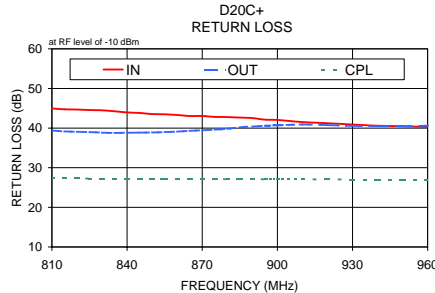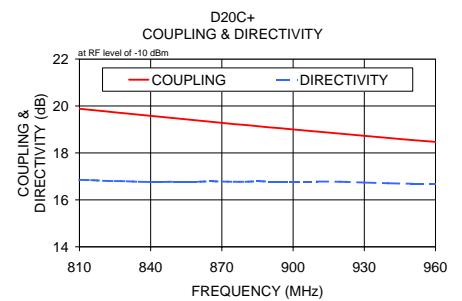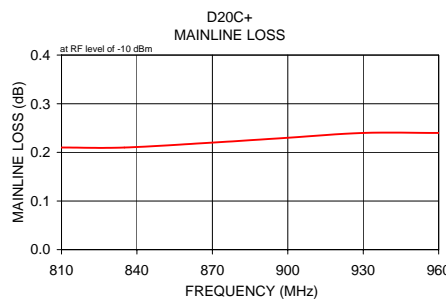

Electrical Schematic

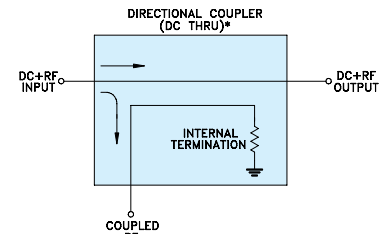

* ELECTRICAL SCHEMATIC FOR DIRECTIONAL COUPLER THAT IS DESIGNED WITHOUT INTERNAL TRANSFORMERS.

ESD Rating

Human Body Model (HBM): Class 1B (500 v to <1000 v) in accordance with ANSI/ESD STM 5.1 - 2001
Machine Model (MM): Class M3 (200 v to <400 v) in accordance with ANSI/ESD STM 5.2 - 1999



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp.

REV. C
M119986
D20C+
JS/TD/CP/AM
090903