

# Surface Mount Voltage Variable Attenuator

## EVA-2-75+

75Ω 50 to 2000 MHz


### Maximum Ratings

Operating Temperature	-45°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage(V+)	7V
Absolute Max. Control Voltage(Vctrl)	9V
Absolute Max. RF Input Level	+22 dBm

### Pin Connections

RF IN	1
RF OUT	6
V CONTROL	3
V+	4
GROUND	2,5


### Outline Drawing

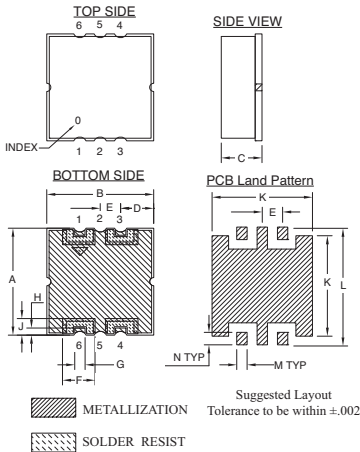

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.394	.394	.150	.122	.075	.120	.038
10.01	10.01	3.81	3.10	1.90	3.05	0.97
H	J	K	L	M	N	wt.
.026	.061	.370	.434	.038	.046	grams
0.66	1.55	9.40	11.02	0.97	1.17	0.7

### Demo Board MCL P/N: TB-381 Suggested PCB Layout (PL-238)

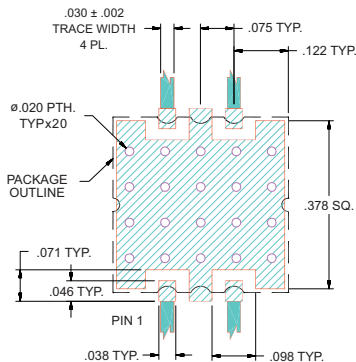

- NOTES:
- TRACE WIDTH IS SHOWN FOR RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Features

- Frequency range, 50-2000 MHz
- IP3, 50 dBm typ.
- Maximum attenuation at minimum current
- No external bias and RF matching network required
- Small size, shielded case
- Aqueous washable

### Applications

- CATV
- Variable gain amplifiers
- Feed forward amplifiers
- ALC circuits



CASE STYLE: HE1135  
PRICE: \$9.95 ea. QTY (10-49)

**+ RoHS compliant in accordance with EU Directive (2002/95/EC)**

The +suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


### Electrical Specifications (T<sub>AMB</sub> = 25°C)

FREQ. (MHz)	MIN. INSERTION LOSS, dB (+8V)		MAX. ATTENUATION dB (0V)		INPUT POWER (dBm)	CONTROL Voltage Current (V) (mA)		IP3 (dBm)	RETURN LOSS (dB)	POWER SUPPLY Voltage Current (V) (mA)	
	Min.	Max.	Typ.	Max.		Typ.	Max.			Typ.	Max.
50 - 1000	2.5	3.5	40	25	+22	0 - 8	40	48	27	+5	3
1000 - 2000	3.0	4.7	24	20	+22	0 - 8	40	51	20	+5	3


### Notes:

Rise/Fall time: 15μSec/36μSec Typ.  
Switching Time, turn on/off: 40μSec. Typ.

### Equivalent Schematic

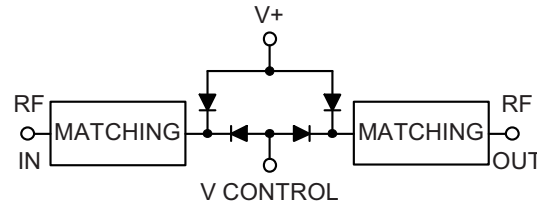

### EVA-2-75+ TYPICAL ATTENUATION AT 500 MHz

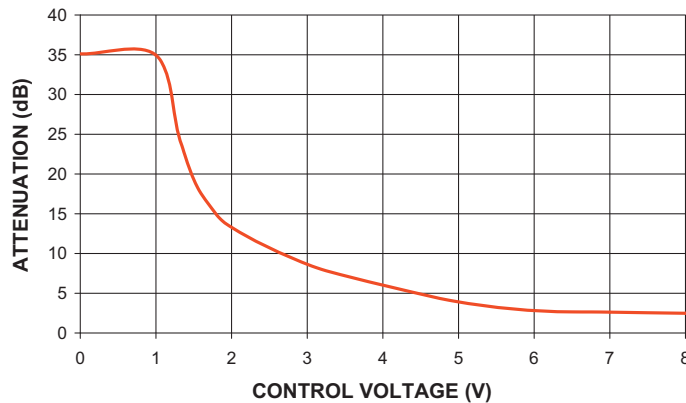

**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

**minicircuits.com**

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)


IF/RF MICROWAVE COMPONENTS

REV. OR  
M103684  
EDR-7165/3  
EVA-2-75+  
RAV  
090219  
Page 1 of 2


**EVA-2-75+  
ATTENUATION Vs. FREQUENCY  
OVER CONTROL VOLTAGES**

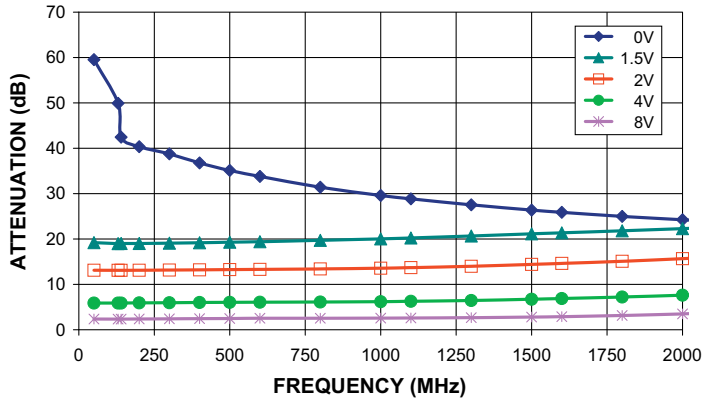


**EVA-2-75+  
ATTENUATION Vs. INPUT POWER  
OVER CONTROL VOLTAGES AT 500 MHz**

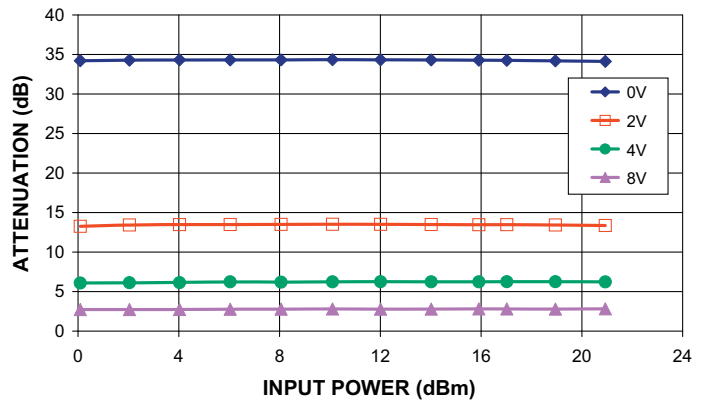


**EVA-2-75+  
INPUT RETURN LOSS Vs. FREQUENCY  
OVER CONTROL VOLTAGES**

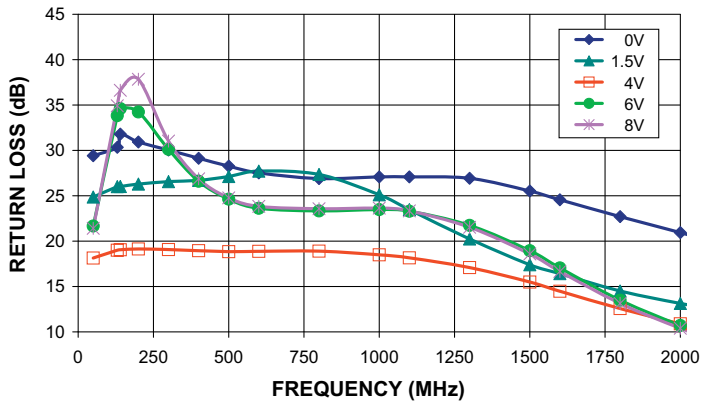

**EVA-2-75+  
OUTPUT RETURN LOSS Vs. FREQUENCY  
OVER CONTROL VOLTAGES**

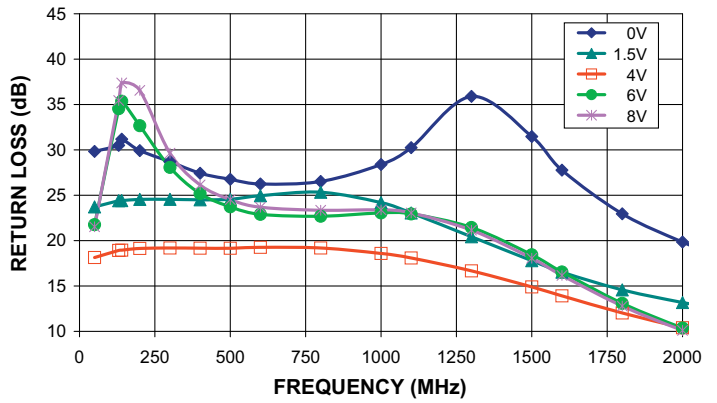

**EVA-2-75+  
IP3 Vs. FREQUENCY  
OVER CONTROL VOLTAGES**

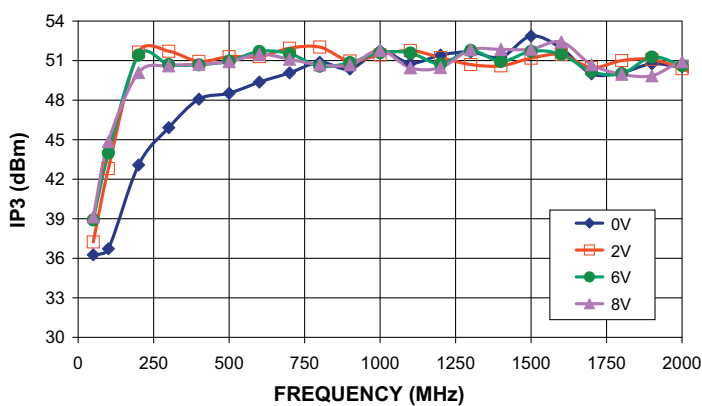

**EVA-2-75+  
PHASE SHIFT Vs. FREQUENCY  
OVER CONTROL VOLTAGES**

