

Surface Mount

Power Splitter/Combiner

GP2X+

2 Way-0° 50Ω 2900 to 6200 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Power Input (as a splitter)	1.5W max.
Internal Dissipation	0.75W max.
Permanent damage may occur if any of these limits are exceeded.	


Pad Connections

SUM PORT	2
PORT 1	7
PORT 2	9
GROUND	1,3,4,5,6,8,10,11,12, paddle

Product Marking




Outline Drawing

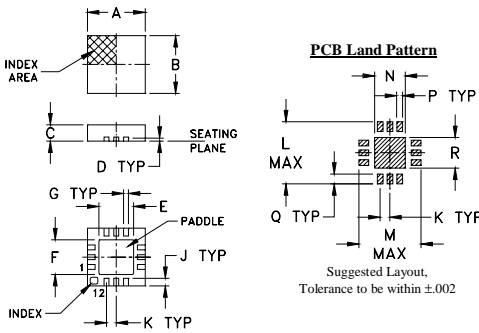

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.118	.118	.035	.008	.057	.057	.009	---	.016
3.00	3.00	0.89	0.20	1.45	1.45	0.23	---	0.41
K	L	M	N	P	Q	R	wt	
.020	.127	.127	.049	.010	.020	.049	grams	
0.51	3.23	3.23	1.24	0.25	0.51	1.24	0.02	

Demo Board MCL P/N: TB-453-GP2X+ Suggested PCB Layout (PL-282)

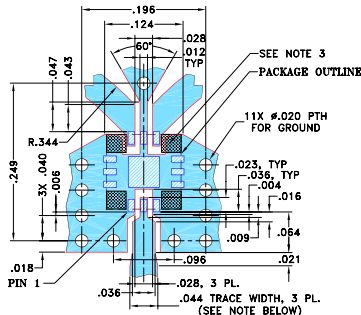

NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- SIGNAL TRACES ARE NOT ALLOWED INSIDE HATCHED AREAS (APPROX. .030 X .030) AT 4 PLACES AS SHOWN.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wide bandwidth, 2900 to 6200 MHz
- excellent amplitude unbalance, 0.05 dB typ.
- good phase unbalance, 3 deg. typ.
- small size, 0.118"x0.118"x0.035"
- high ESD level
- aqueous washable

Applications

- WIMAX • ISM • instrumentation
- radar • WLAN
- satellite communications




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS* (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1) Typ.	
	Typ.	Min.	Typ.	Max.	Max.	Max.	Port S	Ports 1,2
2900-6200	24	15	0.6	1.5	9.0	0.3	1.2	1.2

* De-embedded from demo board loss.

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
2900.00	3.78	3.84	0.06	22.02	2.44	1.08	1.14	1.11
3360.00	3.64	3.68	0.04	21.14	2.92	1.33	1.16	1.13
3540.00	3.61	3.64	0.03	20.67	3.08	1.36	1.15	1.11
3720.00	3.57	3.59	0.03	20.82	3.20	1.34	1.14	1.08
3900.00	3.52	3.55	0.02	21.57	3.30	1.28	1.12	1.04
4080.00	3.48	3.52	0.03	22.89	3.42	1.20	1.09	1.01
4270.00	3.46	3.49	0.04	25.19	3.58	1.12	1.05	1.06
4450.00	3.44	3.49	0.04	29.16	3.77	1.09	1.01	1.11
4990.00	3.51	3.53	0.02	28.55	4.38	1.29	1.13	1.22
5170.00	3.55	3.56	0.01	24.69	4.58	1.36	1.16	1.22
5540.00	3.61	3.62	0.01	20.83	4.94	1.45	1.18	1.18
5720.00	3.62	3.64	0.03	19.75	5.14	1.45	1.17	1.13
5900.00	3.61	3.66	0.05	18.68	5.49	1.45	1.16	1.09
6080.00	3.60	3.65	0.05	17.77	5.73	1.43	1.13	1.05
6260.00	3.59	3.65	0.05	17.10	6.01	1.40	1.10	1.05

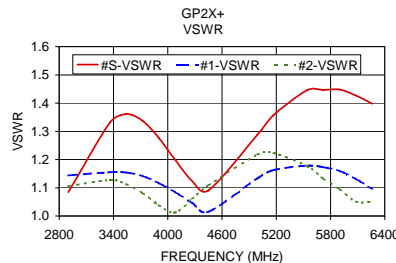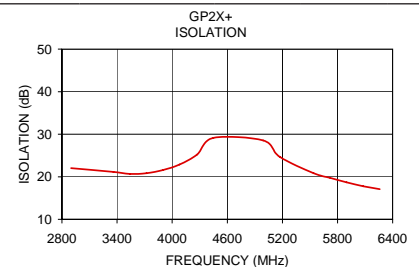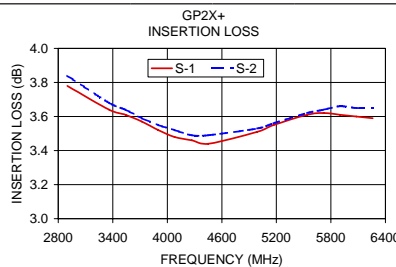

electrical schematic



ESD Rating

Human Body Model (HBM): Class 1A (250 to < 500V) in accordance with ANSI/ESD STM 5.1 - 2001
Machine Model (MM): Class M2 (100V to < 250V) in accordance with ANSI/ESD STM 5.2 - 1999

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

The Design Engineers Search Engine
I/IRF MICROWAVE COMPONENTS

For detailed performance specs & shipping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable standard test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard

Rev. A
M119987
GP2X+
ED-13012A/3
RS/CP
090817