

Surface Mount Power Splitter/Combiner

JPS-3-1+ JPS-3-1

3 Way-0° 50Ω 5 to 300 MHz



Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.375W max.

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

SUM PORT	1
PORT 1	6
PORT 2	4
PORT 3	3
GROUND	2,5


Outline Drawing

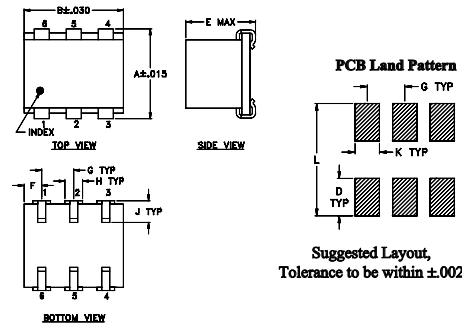

Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54
H	J	K	L		wt	
.047	.065	.065	.300		grams	
1.19	1.65	1.65	7.62		0.45	

Demo Board MCL P/N: TB-211 Suggested PCB Layout (PL-097)

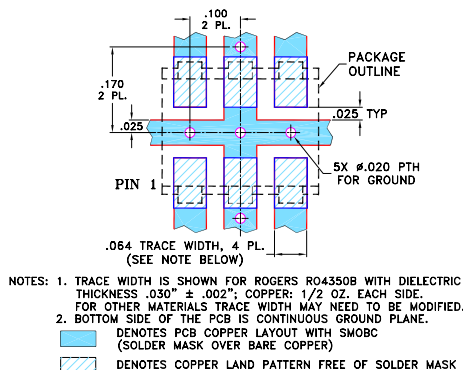

Features

- wideband, 5 to 300 MHz
- high isolation, 33 dB typ.
- low insertion loss, 0.3 dB typ.

Applications

- VHF
- defense & federal communications
- amateur & FM radio

CASE STYLE: BH292
PRICE: \$13.95 ea. QTY. (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 4.8 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)								
	L	M	U	L	M	U	L	M	U	L	M	U						
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.						
f _L -f _U																		
5-300	34	25	33	23	32	20	0.3	0.6	0.3	0.7	0.5	1.4	2.0	4.0	6.0	0.4	0.4	0.6

L = low range [f_L to f_L/2] M = mid range [10 f_L to f_L/2] U = upper range [f_L/2 to f_U]

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	1-3	2-3					
5.00	4.96	5.08	5.03	0.12	36.91	33.62	35.80	0.62	1.09	1.11	1.13	1.16
8.00	4.93	5.07	5.00	0.14	37.89	34.24	35.50	0.52	1.07	1.08	1.10	1.14
10.00	4.94	5.04	5.00	0.11	38.11	34.35	35.29	0.36	1.06	1.07	1.10	1.13
20.00	4.95	5.04	4.99	0.09	37.92	34.31	34.69	0.22	1.04	1.06	1.08	1.12
35.00	4.98	5.06	5.02	0.08	37.22	33.58	33.72	0.13	1.04	1.05	1.07	1.11
50.00	4.99	5.08	5.05	0.09	36.36	33.15	32.78	0.13	1.03	1.04	1.06	1.11
65.00	5.01	5.10	5.04	0.08	35.45	32.52	31.94	0.25	1.03	1.04	1.05	1.11
80.00	5.03	5.11	5.06	0.08	34.62	31.74	31.15	0.26	1.04	1.04	1.05	1.10
95.00	5.05	5.13	5.08	0.08	34.24	31.40	30.56	0.14	1.04	1.04	1.05	1.09
110.00	5.08	5.15	5.10	0.07	34.06	31.26	30.29	0.23	1.04	1.04	1.05	1.09
130.00	5.11	5.17	5.12	0.06	34.13	31.25	29.99	0.37	1.05	1.04	1.05	1.08
170.00	5.18	5.22	5.16	0.05	33.68	30.69	28.91	0.41	1.03	1.03	1.07	1.07
210.00	5.24	5.27	5.22	0.05	35.00	30.99	28.88	0.54	1.07	1.01	1.07	1.07
250.00	5.34	5.32	5.27	0.07	40.60	33.64	29.78	0.57	1.12	1.02	1.08	1.08
300.00	5.50	5.45	5.37	0.12	41.62	40.75	30.25	0.91	1.11	1.02	1.12	1.11

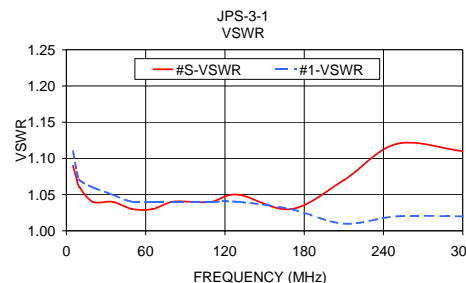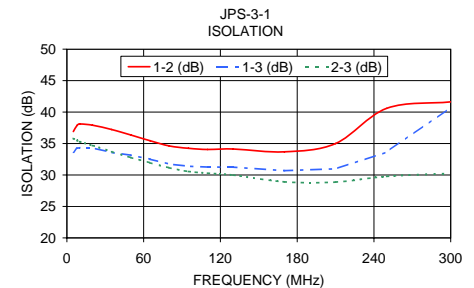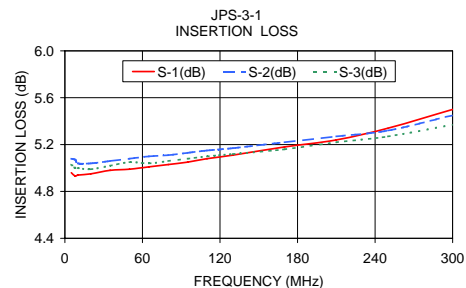

electrical schematic



Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M102713
JPS-3-1
DY/TD/CP
090826