

# X2 Frequency Multiplier

## LK-3000+

50Ω Output 140 to 3000 MHz



CASE STYLE: BB48  
PRICE: \$72.95 ea. QTY (1-9)

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Input Power	200mW
Permanent damage may occur if any of these limits are exceeded.	

### Pin Connections

INPUT	4
OUTPUT	8
GROUND	1,2,3,5,6,7
CASE GROUND	1,2,3,5,6,7

### Features

- wideband, 140 to 3000 MHz
- low conversion loss, 11 dB typ.
- drop-in flat pack


### Applications

- synthesizers
- local oscillators

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

### Outline Drawing

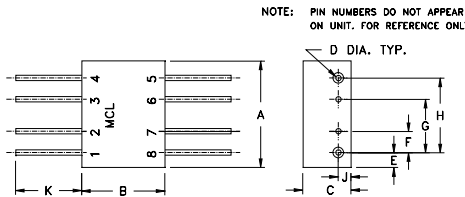

### Outline Dimensions (inch/mm)

A	B	C	D	E	F
.50	.39	.225	.025	.07	.100
12.70	9.91	5.72	0.64	1.78	2.54
G	H	J	K	wt	
.250	.350	.06	.31		grams
6.35	8.89	1.52	7.87		3.0





### Electrical Specifications

MULTIPLICATION FACTOR	FREQUENCY (MHz)		INPUT POWER (dBm)		CONVERSION LOSS (dB)		*HARMONIC OUTPUT (dBc)					
	F1	F2					F1		F3		F4	
	Input	Output	Min.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.
2	70-1000	140-2000	12	15	10.5	14.0	31	20	40	25	15	10
	1000-1500	2000-3000	12	15	11.5	16.0	22	15	35	20	20	14

\* Harmonics of input frequency below the power level of F2

### Typical Performance Data

Input Frequency (MHz)	Conversion Loss (dB) F2	Harmonic Output (-dBc)		
		F1	F3	F4
70.00	10.32	49.20	51.20	15.70
100.00	10.54	50.60	54.20	15.60
200.00	10.39	43.70	54.10	16.90
450.00	10.94	34.30	46.80	15.60
500.00	10.91	34.80	47.80	14.90
700.00	10.69	29.70	43.40	16.90
900.00	10.56	28.10	39.50	23.10
1000.00	10.82	25.80	33.90	21.70
1200.00	12.43	25.10	42.90	25.60
1500.00	13.30	21.90	29.70	40.20

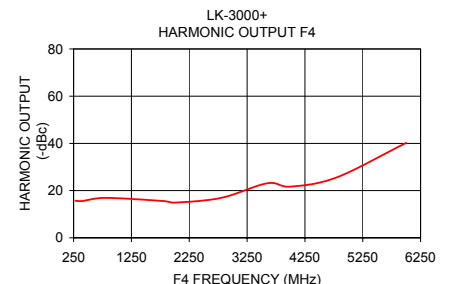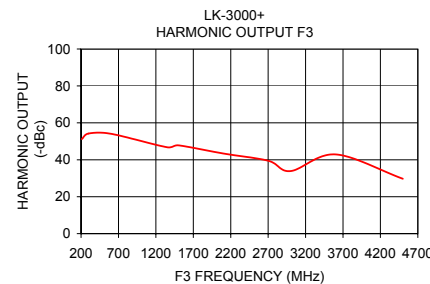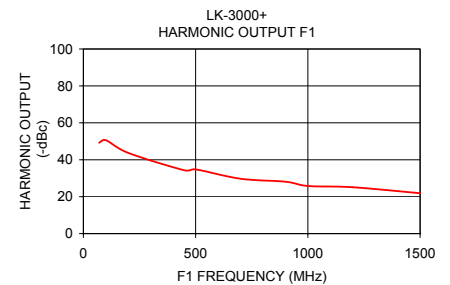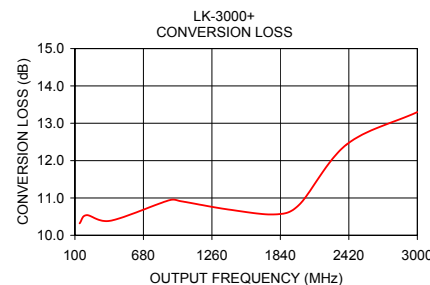

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. C  
M126372  
LK-3000+  
AD/CP/AM  
100215