


Plug-In Low Noise Amplifier

MAN-1LN

50Ω 0.5 to 500 MHz



CASE STYLE: A05
PRICE: \$22.20 ea. Qty. (1-9)

Features

- low noise, 3.0 dB typ.
- hermetic case
- protected by US Patent, 6,943,629

Applications

- VHF/UHF
- military, hi-rel applications

Low Noise Amplifier Electrical Specifications

MODEL NO.	FREQUENCY (MHz)		NOISE FIGURE (dB)	GAIN (dB)			MAXIMUM POWER (dBm)		INTERCEPT POINT (dBm)	VSWR (:1) Typ.		DC POWER	
	f _L	f _U		Typ.	Min.	m	Total Range	Output (1 dB Compr.)		Input (no damage)	IP3 Typ.	In	Out
MAN-1LN	0.5	500	3.0	28	±0.5	±1.4	+7*	+15	+18	1.8	1.8	12	60

m = mid range [2 f_L to f_U/2]

Open load is not recommended, potentially can cause damage.

With no load derate max input power by 20 dB

* Below 5 MHz, 1 dB compression point decreases to 6.5 dBm.

Pin Connections


RF IN	1
RF OUT	8
DC	5
GROUND	2,3,4,6
CASE GROUND	2,3,4,6
NOT USED	7

Maximum Ratings

Operating Temperature	-54°C to 85°C
Storage Temperature	-55°C to 100°C
DC Voltage	+12.5V Max.

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

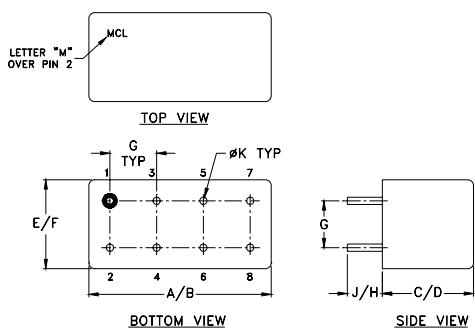

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	wt
.770	.800	.240	.250	.370	.400	.200	.20	.14	.031	grams
19.558	20.32	6.096	6.35	9.398	10.16	5.08	5.08	3.556	0.7874	3.7

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com






IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Typical Performance Data/Curves

MAN-1LN

FREQUENCY (MHz)	GAIN (dB)			DIRECTIVITY (dB)			VSWR (:1)		NOISE FIGURE (dB)	POUT at 1 dB COMPR. (dBm)
	11V	12V	12.5V	11V	12V	12.5V	IN	OUT		
0.50	29.88	31.30	31.73	13.20	12.90	12.60	1.35	1.67	—	8.01
1.90	30.44	31.89	32.32	12.50	12.10	11.60	1.13	1.18	—	8.42
11.40	30.58	32.02	32.45	12.50	11.70	11.40	1.04	1.05	2.82	8.32
68.30	30.71	32.13	32.54	12.70	11.50	11.50	1.07	1.05	2.91	8.54
192.60	30.89	32.27	32.66	12.20	11.00	11.10	1.18	1.12	2.81	8.47
243.80	30.93	32.30	32.69	11.60	10.40	10.90	1.24	1.15	2.84	8.45
307.90	30.94	32.29	32.68	11.30	10.40	10.30	1.31	1.23	2.88	8.50
371.90	30.90	32.20	32.58	11.10	9.90	10.30	1.39	1.30	2.95	8.45
436.00	30.82	32.07	32.42	10.40	10.20	9.80	1.45	1.31	3.01	8.49
500.00	30.63	31.80	32.12	9.30	7.80	7.30	1.50	1.46	3.08	8.52

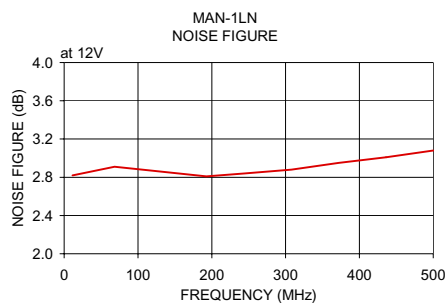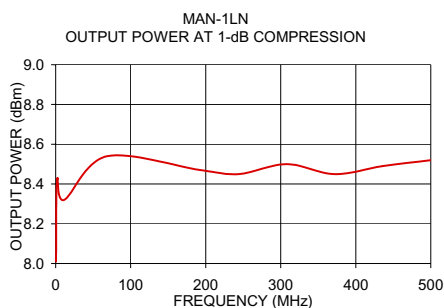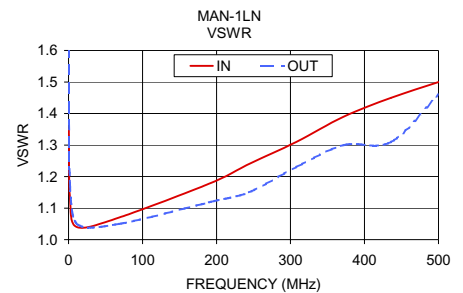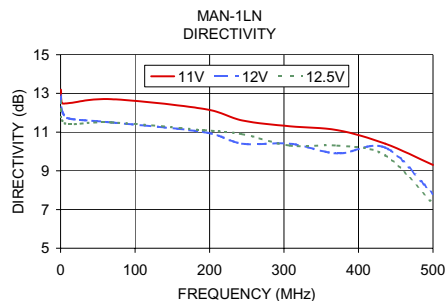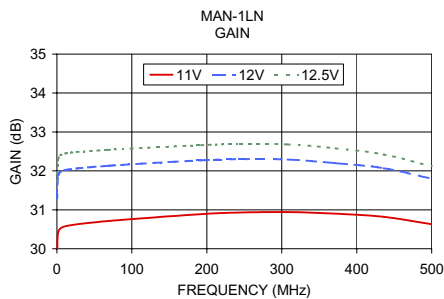

Mini-Circuits
 ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.