

Ceramic

Frequency Mixer WIDE BAND

MCA1-12GL+

Level 4 (LO Power+4 dBm) 3800 to 12000 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50 mW
IF Current	40 mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9

Outline Drawing

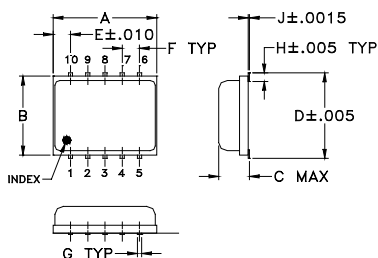

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G
.30	.250	.085	.266	.050	.050	.012
7.62	6.35	2.16	6.76	1.27	1.27	0.30
H	J	K	L	M	wt	
.029	.004	.085	.296	.030	grams	
0.74	0.10	2.16	7.52	0.76	0.25	

Demo Board MCL P/N: TB-144 Suggested PCB Layout (PL-045)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wide bandwidth, 3800 to 12000 MHz
- high L-R isolation, 32 dB typ.
- IF, DC to 1500 MHz
- LTCC double balanced mixer
- aqueous washable
- low cost
- low profile, 0.08"
- protected by US Patent 7,027,795

Applications

- satellite up and down converters
- line of sight links
- defense radar
- defense communication
- federal fixed service



CASE STYLE: DZ885

PRICE: \$11.95 ea. QTY (10-49)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS
Compliance. See our web site for RoHS Compliance
methodologies and qualifications.

Electrical Specifications (T_{AMB} = -55°C to 100°C)

FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f _L -f _U	IF	$\bar{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	Typ.
3800-12000	DC-1500								
3800-6500	DC-1500	6.8	0.2	8.5*	32	17	13	8	9
6500-9500	DC-1500	6.5	0.3	9.2*	38	24	40	23	7
9500-12000	DC-1500	7.0	0.3	—	25	17	26	15	6


1 dB COMPR. +1 dBm typ.

* Conversion loss at 30 MHz IF, increases with IF frequency.

Typical Performance Data at 25°C

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +4dBm	LO +4dBm	LO +4dBm	LO +4dBm	LO +4dBm
3800.10	3770.10	5.83	31.67	11.75	2.08	2.41
4200.10	4170.10	5.28	33.16	12.89	2.07	2.08
4600.10	4570.10	5.07	30.20	14.54	1.67	2.33
5000.10	4970.10	5.98	30.01	13.24	2.24	1.89
5400.10	5370.10	6.53	21.42	11.36	1.78	2.38
5800.10	5770.10	7.07	22.02	15.36	1.95	2.37
6200.10	6170.10	6.21	28.40	23.67	1.97	3.46
6600.10	6570.10	5.94	39.11	32.57	1.87	3.60
7000.10	6970.10	6.69	48.57	37.06	2.66	3.48
7400.10	7370.10	6.28	39.19	39.61	2.08	3.09
7800.10	7770.10	6.75	35.85	42.58	2.15	3.22
8200.10	8170.10	6.17	36.80	46.61	1.98	3.44
8600.10	8570.10	5.98	35.42	43.55	2.14	2.72
9000.10	8970.10	5.99	33.01	35.36	2.33	2.63
9400.10	9370.10	6.26	32.37	28.27	2.46	2.50
9800.10	9770.10	6.84	32.40	23.97	2.36	4.18
10200.10	10170.10	6.70	31.25	23.95	2.01	3.87
10800.10	10770.10	6.07	26.53	31.09	1.74	3.19
11200.10	11170.10	6.61	24.29	27.16	2.14	2.99
12000.10	11970.10	7.41	21.24	25.82	1.76	2.04

Electrical Schematic

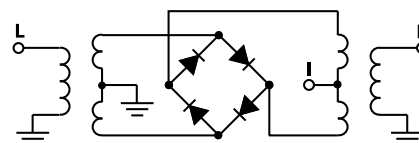

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

For detailed performance specs
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine **Provides ACTUAL Data Instantly at minicircuits.com**









IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. C
M102713
ED-11119/1
MCA1-12GL+
DJ/RS/CP
070423
Page 1 of 2

Performance Charts

MCA1-12GL+

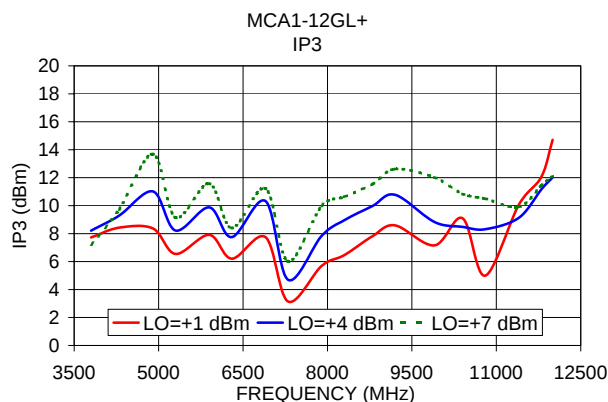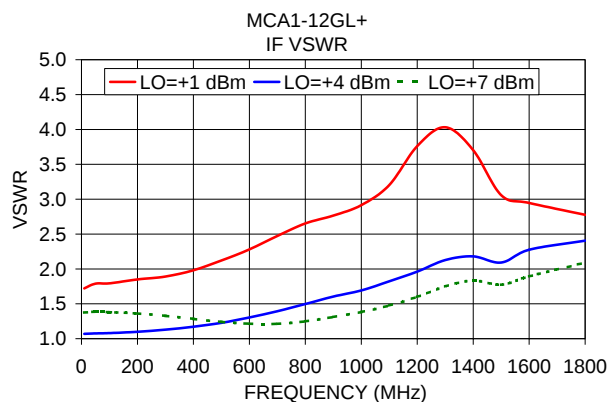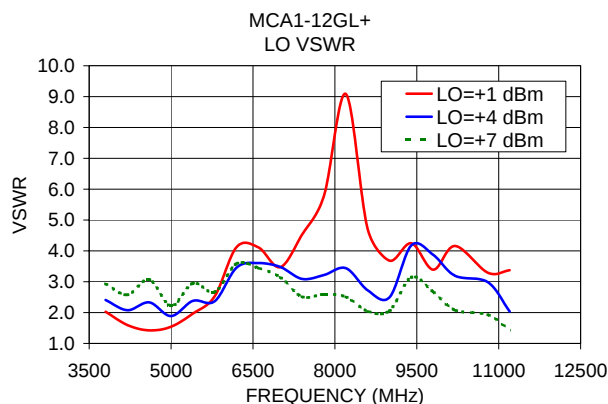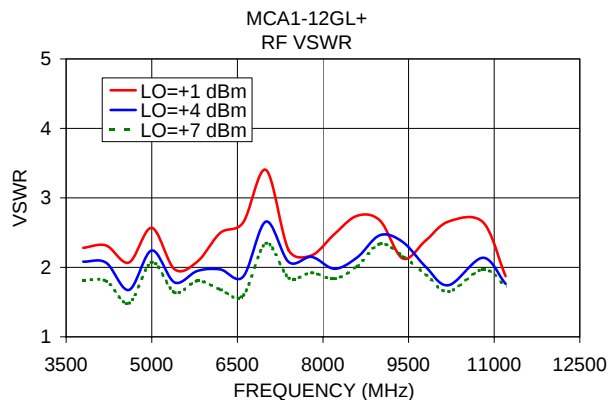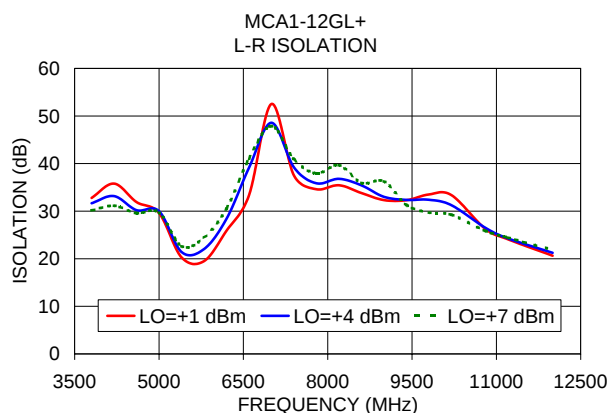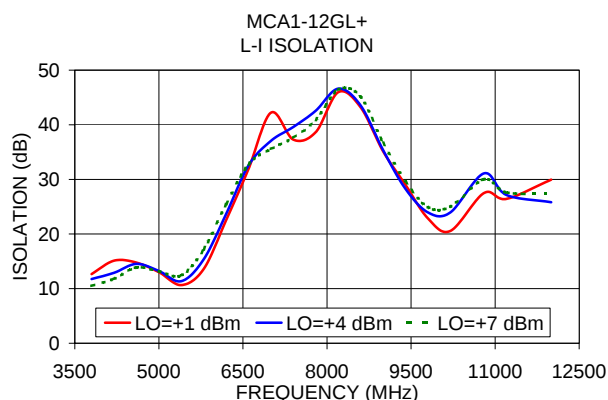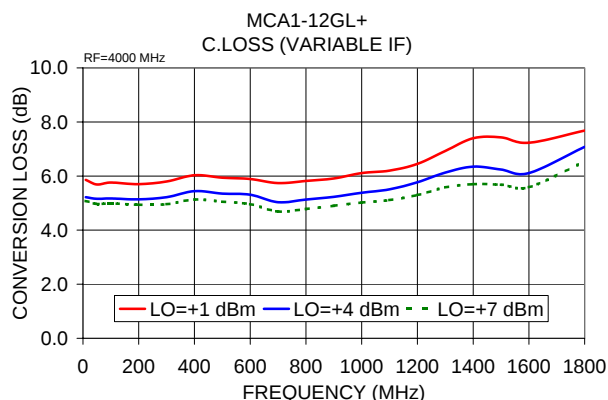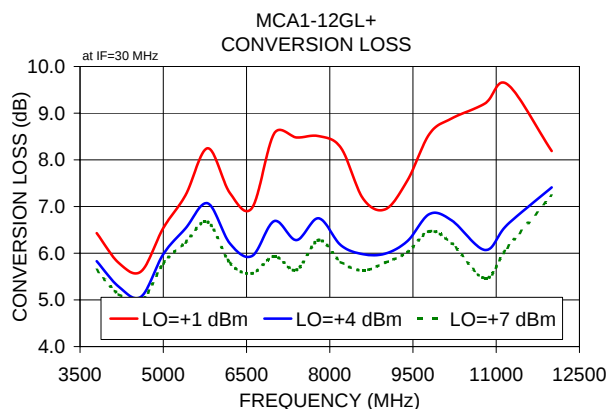

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.