

Surface Mount Power Splitter/Combiner

QBA-07+ QBA-07

2 Way-90° 50Ω 340 to 680 MHz



Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.


Pin Connections

SUM PORT	1
PORT 1 (+90°)	10
PORT 2 (0°)	6
GROUND	2,3,4,7,8,9
50 OHM TERM EXTERNAL	5

Outline Drawing



PCB Land Pattern




Suggested Layout,
Tolerance to be within ±0.02
ADJACENT GROUND PINS SHALL BE CONNECTED
TO EACH OTHER AND TO GROUND PAD

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	
.250	.300	.070	.320	.050	.015	.050	.075	
6.35	7.62	1.78	8.13	1.27	0.38	1.27	1.91	
J	K	L	M	N	P	Q	R	wt
.030	.095	.330	.100	.020	.015	.070	.014	grams
0.76	2.41	8.38	2.54	0.51	0.38	1.78	0.36	0.3

Demo Board MCL P/N: TB-115+ Suggested PCB Layout (PL-004)



NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020 ± .0015; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.5 dB typ.
- high power capability, 27W
- hermetically sealed
- low variation with temperature
- low profile, 0.07" height
- aqueous washable
- protected by U.S. Patent 5,534,830

Applications

- NMT
- land mobile radio
- broadcasting

Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of Coupled Outputs less 3 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		THERMAL RESISTANCE θjc, °C/W	POWER (W)
	Typ.	Min.	\bar{X}	σ	Typ.	Max.	Typ.	Max.		
f _L -f _H										
340-680	22	16	0.8	0.1	3.0	7.0	0.7	2.0	20	21*
340-530	23	18	0.5	0.1	1.7	4.0	0.7	2.0	20	27**

* Derate linearly to 9W at 100°C
** Derate linearly to 12W at 100°C




CASE STYLE: SM1L
PRICE: \$6.95 ea. QTY (10-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
340.00	3.99	3.00	0.99	23.80	90.39	1.14	1.08	1.12
400.00	3.53	3.46	0.07	22.78	90.93	1.17	1.10	1.14
430.00	3.36	3.64	0.27	22.29	91.23	1.19	1.11	1.14
460.00	3.24	3.80	0.56	21.83	91.60	1.20	1.12	1.15
500.00	3.15	3.98	0.83	21.25	91.99	1.22	1.14	1.17
530.00	3.10	4.05	0.96	20.80	92.41	1.24	1.15	1.18
590.00	3.12	4.17	1.05	19.93	93.19	1.27	1.18	1.20
600.00	3.13	4.17	1.04	19.79	93.37	1.27	1.19	1.21
640.00	3.20	4.14	0.94	19.19	94.07	1.29	1.21	1.22
660.00	3.28	4.13	0.85	18.91	94.38	1.30	1.22	1.23
680.00	3.37	4.09	0.73	18.63	94.75	1.31	1.23	1.24

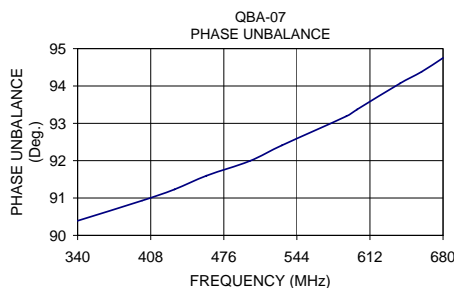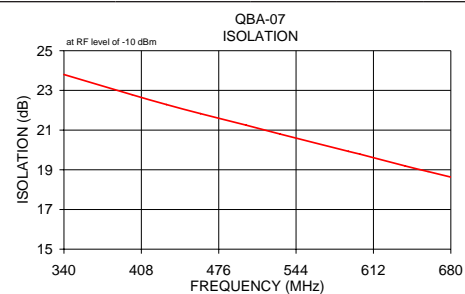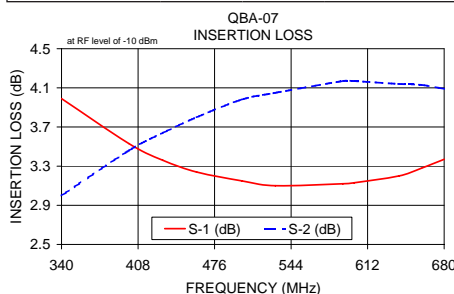

electrical schematic



For detailed performance specs & shopping online see web site

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
IFIRF MICROWAVE COMPONENTS

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. D
M102713
ED-8943/03
QBA-07
LC/TD/CP
090824