

High Pass Filter

RHP-180+

50Ω 300 to 3000 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W at 25°C

Pin Connections

INPUT	2
OUTPUT	6
GROUND	1, 3, 4, 5, 7, 8

Outline Drawing

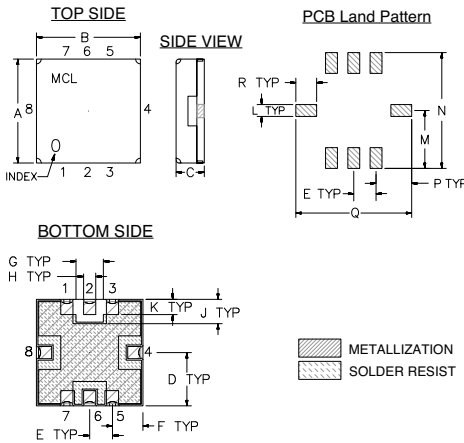


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.350	.350	.100	.175	.075	.100	.090	.040	.080
8.89	8.89	2.54	4.45	1.93	2.54	2.29	1.02	2.03

K	L	M	N	P	Q	R	wt.
.050	.040	.195	.390	.120	.390	.070	grams
1.27	1.02	4.95	9.91	3.05	9.91	1.78	0.25

Demo Board MCL P/N: TB-332
Suggested PCB Layout (PL-176)

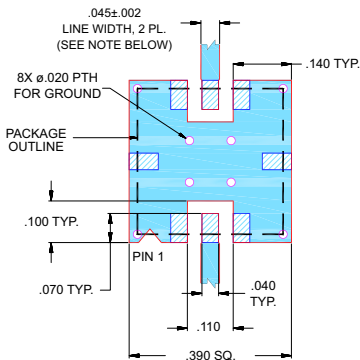

NOTES:
1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025 ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.


DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- Low Insertion Loss, 0.5dB Typ @ Passband
- High Rejection
- Shielded case
- Aqueous washable

Applications

- Transmitters/Receivers
- Sub-Harmonic Rejection
- Military communications



CASE STYLE: GP731
PRICE: \$13.95 ea. QTY (1-9)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.


High Pass Filter Electrical Specifications (T_{AMB} = 25°C)

STOPBAND (MHz)		f _{co} , MHz Nom.	PASSBAND (MHz)	VSWR (:1)	
(Loss > 40dB)	(Loss > 20dB)	(Loss 3dB)	(Loss < 1dB)	Stopband Typ.	Passband Typ.
DC - 100	DC - 135	180	300 - 3000	18	1.2

Typical Frequency Response





Functional Schematic

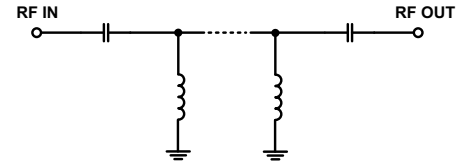

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.0	76.59	1100.71
10.0	84.80	3575.04
30.0	81.89	2557.85
50.0	78.94	937.93
98.5	50.86	126.88
100.0	49.70	124.82
103.0	47.72	117.88
122.0	35.47	69.19
135.0	27.44	46.38
146.0	20.76	30.22
180.0	2.90	2.49
216.0	0.88	1.28
300.0	0.47	1.18
500.0	0.28	1.03
1000.0	0.26	1.12
1500.0	0.34	1.24
2000.0	0.43	1.35
3000.0	0.50	1.31

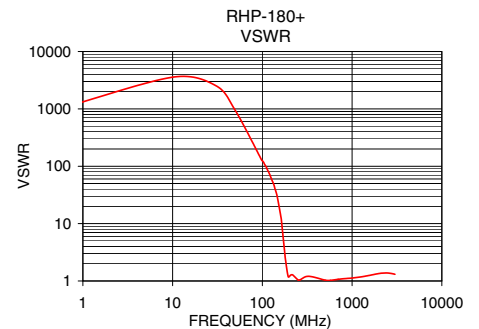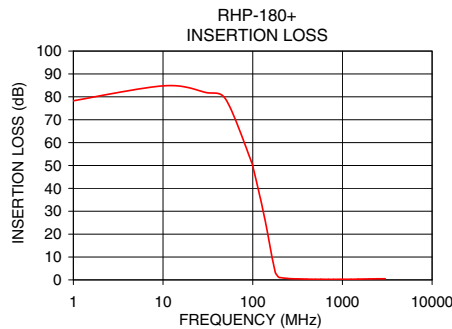

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
M114801
EDR-8694U
RHP-180+
URJ/RAV
071204
Page 1 of 1