

# X5 Frequency Multiplier

50Ω Output 37.5 to 52.5 MHz

## RMK-5-51+



CASE STYLE: TT1224

### The Big Deal

- High rejection of adjacent harmonics, 50 dBc typ.
- 50 Ω in/out, no tuning necessary
- Very low cost, \$19.95 (qty. 10-49)

### Product Overview

The RMK-5-51+ is a cost-effective X5 frequency multiplier that utilizes specially selected silicon Schottky diodes and compatible filter circuitry to achieve a low conversion loss, yet have a high rejection of unwanted harmonics near its F5 output. It makes the RMK-5-51+ ideal for a wide range of applications. The tiny plastic case, 0.25" x 0.31" x 0.16" high, is aqueous washable and RoHS compliant.

Feature	Advantages
<23 dB conversion loss	Efficient choice for multiplying a 10 MHz source to 50 MHz output while maintaining reasonable signal power, especially for reference crystal oscillators. Only 13 dBm input required for -10 dBm output for low-loss systems such as instrumentation and ISM.
50 dB rejection of F4 and F6	Proprietary internal circuitry achieves high suppression and minimizes filter requirements for undesired signals, as in wireless Tx/Rx for military applications, aircraft, cordless telephones, remote control, and PMR
Internally balanced to 50Ω in/out, no DC power required	Saves PCB space and simplifies application design, with no external matching or biasing circuits required
Small surface mount package	Easily integrated in systems with minimal PCB area available



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

**Notes:** 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

# X5 Frequency Multiplier

## RMK-5-51+

50Ω Output 37.5 to 52.5 MHz



CASE STYLE: TT1224  
PRICE: \$19.95 ea. QTY (10-49)

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Input Power	20 dBm

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

INPUT	1
OUTPUT	4
GROUND	2,3,5,6

### Features

- 5<sup>th</sup> order multiplication
- high dBc rejection adjacent harmonics
- low cost
- aqueous washable

### Applications

- synthesizers
- local oscillators
- satellite up and down converters

+ RoHS compliant in accordance with EU Directive (2002/95/EC)


The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

### Electrical Specifications at 25°C

Parameter	Min.	Typ.	Max.	Unit
Multiplier Factor		5		
Frequency Range, Input (F1)		7.5 - 10.5		MHz
Frequency Range, Output (F5)		37.5 - 52.5		MHz
Input Power	0	—	5	dBm
Conversion Loss	—	22.9	26	dB
Harmonic Output*, -dBc				dB
F1	-4	-1.3	—	
F2	35	43.8	—	
F3	-10	-6	—	
F4	28	39	—	
F6	30	37	—	
F7	0	4	—	
F8	32	39	—	

\* Harmonics of input frequency below the power level of F5

### Outline Drawing

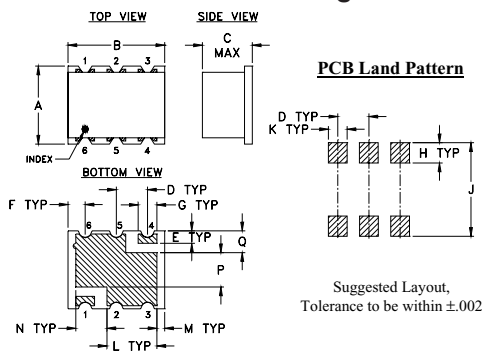

### Outline Dimensions (inch)

A	B	C	D	E	F	G	H
.25	.31	.16	.100	.040	.055	.060	.065
6.35	7.87	4.06	2.54	1.02	1.40	1.52	1.65
J	K	L	M	N	P	Q	wt.
.300	.060	.160	.025	.100	.110	.070	grams
7.62	1.52	4.06	0.64	2.54	2.79	1.78	0.16


### Typical Performance Data

Frequency	Input (MHz)	Output (MHz)	Conv. Loss (dB) F5	Harmonic Rejection Below F5 (dB) at RF Input Power 0 dBm							
				F1	F2	F3	F4	F6	F7	F8	
7.50	37.50	22.45	5.11	51.91	-1.40	44.41	45.68	7.26	51.16		
8.00	40.00	22.13	4.30	51.20	-2.21	44.26	46.39	7.68	53.11		
8.50	42.50	21.81	3.47	52.77	-2.90	46.44	49.17	8.03	56.27		
9.00	45.00	21.58	2.55	56.05	-3.59	50.48	53.89	8.42	61.44		
9.50	47.50	21.55	1.56	73.55	-4.30	73.05	72.21	8.78	76.10		
10.00	50.00	21.83	0.42	69.32	-5.08	60.02	61.46	9.24	65.77		
10.50	52.50	22.72	-1.29	62.25	-6.22	57.83	60.43	10.31	65.15		

at RF Input Power 5 dBm										
7.50	37.50	22.89	8.33	47.06	0.91	38.25	37.20	3.54	39.00	
8.00	40.00	22.51	7.61	46.79	0.22	38.28	37.87	4.07	40.07	
8.50	42.50	22.41	6.68	46.52	-0.56	38.45	38.69	4.65	41.32	
9.00	45.00	22.36	5.69	47.29	-1.35	39.74	40.62	5.17	43.59	
9.50	47.50	22.31	4.75	57.24	-2.05	50.82	53.61	5.50	56.53	
10.00	50.00	22.18	3.95	54.02	-2.62	48.61	50.65	5.63	52.87	
10.50	52.50	21.88	3.22	44.28	-3.14	38.45	40.91	5.64	43.53	

### Demo Board MCL P/N: TB-393 Suggested PCB Layout (PL-258)

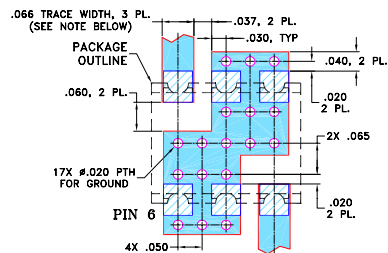

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK











For detailed performance specs & shipping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IFIRF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

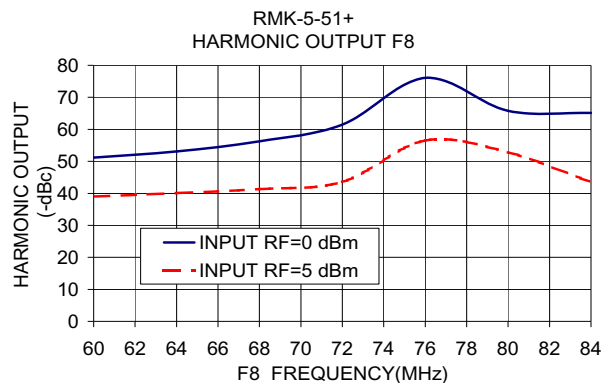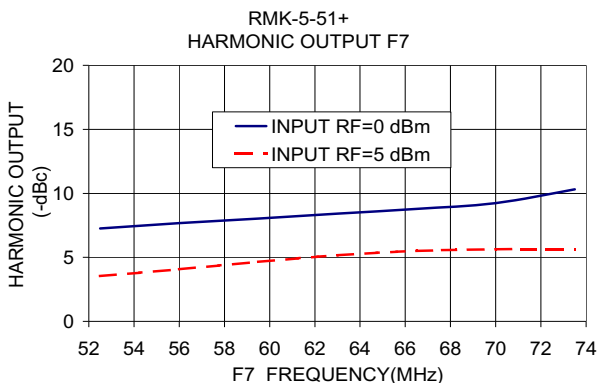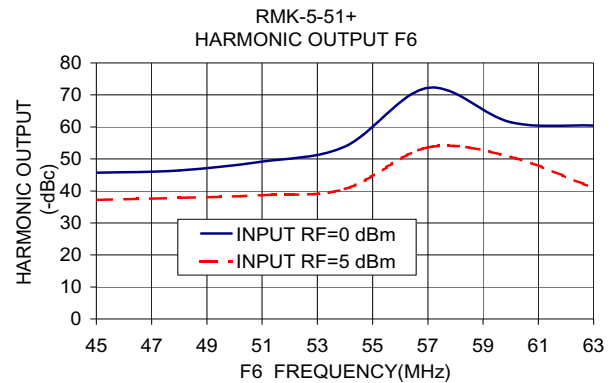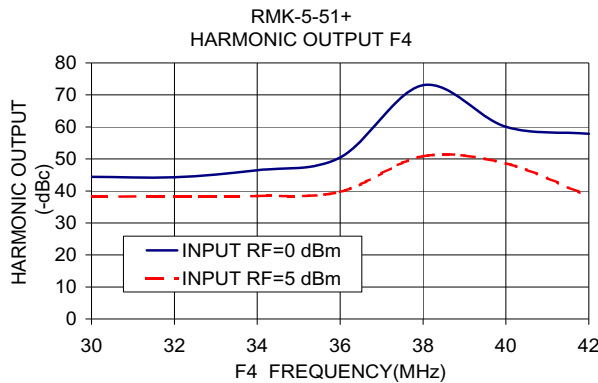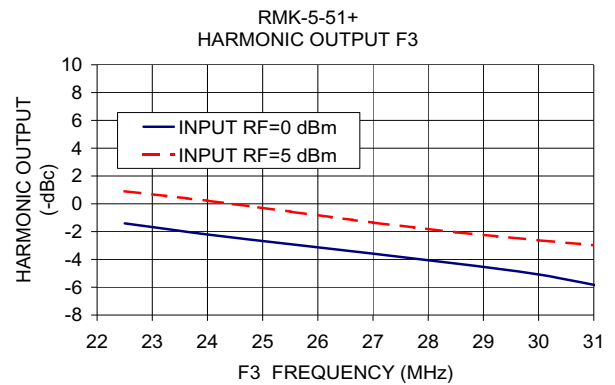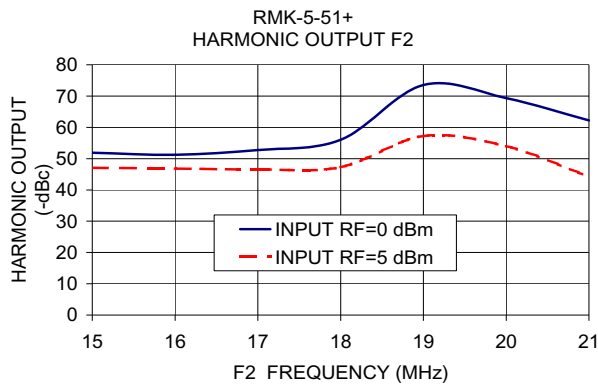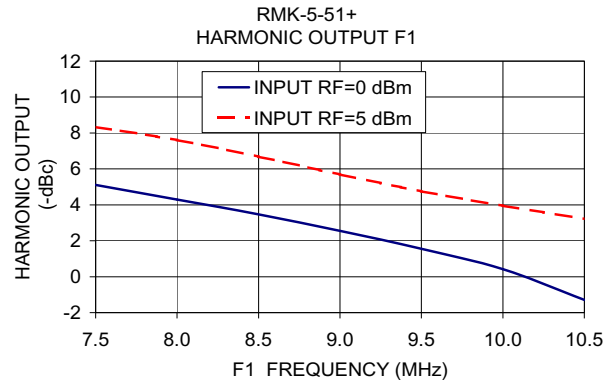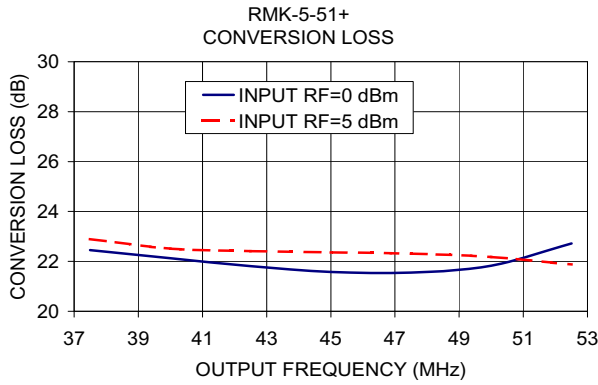

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).