

Power Splitter/Combiners SBTC-2-15-75+ SBTC-2-15-75L+

2 Way-0° 75Ω

500 to 1500 MHz



No Leads
CASE STYLE:AT790
PRICE:\$3.49 ea. QTY (25)
\$2.69 ea. QTY (1000)



Leads
CASE STYLE:AT1029
PRICE:\$3.64 ea. QTY (25)
\$2.84 ea. QTY (1000)

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.125W max.

Pin Connections


SUM PORT	6
PORT 1	3
PORT 2	4
GROUND	1,2
NOT USED	5

Outline Drawing / Dimensions (inch/mm)


AT790 (SBTC-2-15-75+)

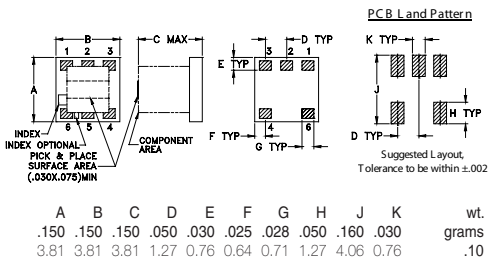

AT1029 (SBTC-2-15-75L+)

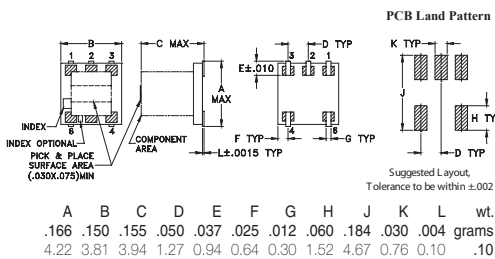

Demo Board MCL P/N: TB-277
Suggested PCB Layout (PL-153)

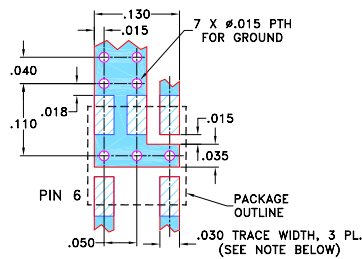

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
▨ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- low insertion loss, 0.8 dB typ.
- excellent isolation 28 dB typ.
- very good phase unbalance, 1 deg. typ.
- small size, 0.166"x0.150"x0.155"
- temperature stable LTCC base
- small size
- low cost
- aqueous washable
- protected by US patent 6,963,255

Applications




- internet over satellite modems
- VSAT

Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)	INSERTION LOSS (dB) ABOVE 3.0 dB	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)
f_L - f_U	Typ. Min.	Typ. Max.	Max.	Max.
500-1500	28 18	0.8 1.5	5	0.9
700-1500	28 20	0.8 1.5	4	0.7

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB) S-1	Insertion Loss (dB) S-2	Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
500.00	4.19	3.61	0.58	21.98	1.92	1.11	1.73	1.57
600.00	4.12	3.63	0.49	25.03	1.30	1.08	1.60	1.50
700.00	3.97	3.58	0.39	27.04	0.91	1.08	1.51	1.42
800.00	3.93	3.61	0.32	30.56	0.59	1.08	1.36	1.35
850.00	3.92	3.63	0.29	32.53	0.44	1.08	1.33	1.33
900.00	3.90	3.64	0.25	33.74	0.29	1.08	1.32	1.31
950.00	3.88	3.66	0.22	35.62	0.20	1.09	1.28	1.29
1000.00	3.86	3.68	0.18	39.45	0.15	1.10	1.22	1.27
1100.00	3.84	3.74	0.10	45.64	0.17	1.11	1.22	1.28
1200.00	3.85	3.81	0.04	43.71	0.19	1.14	1.14	1.24
1250.00	3.83	3.83	0.03	41.60	0.21	1.15	1.10	1.22
1300.00	3.81	3.86	0.05	41.15	0.19	1.17	1.10	1.23
1400.00	3.82	3.95	0.13	42.70	0.21	1.22	1.09	1.26
1450.00	3.83	4.00	0.17	42.33	0.24	1.25	1.11	1.27
1500.00	3.84	4.05	0.21	42.11	0.30	1.28	1.15	1.30

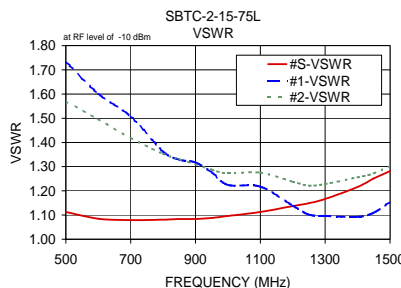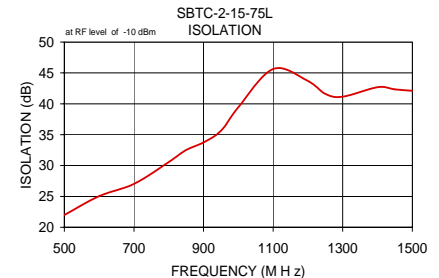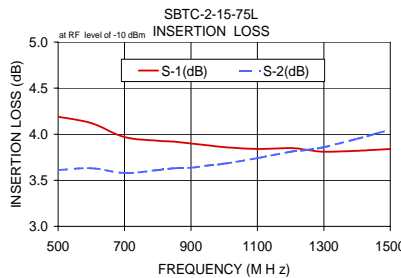

electrical schematic

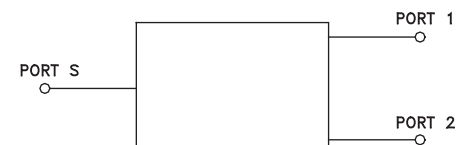

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs & shopping online see web site

REV. E
M11888
SBTC-2-15-75+ ED-9230/2
SBTC-2-15-75L+ ED-9230A/1
WZTD/CP
100520