


DC Pass, High Power

# Bi-Directional Coupler

SCBD-10-63HP+

50Ω Up to 100W 50 to 6000 MHz



CASE STYLE: JB1233-1

## The Big Deal

- Wideband, 50 to 6000 MHz
- High power handling, up to 100W
- Low mainline loss, 0.5 dB
- Good return loss, up to 20 dB (input/output/coupling)

## Product Overview

Mini-Circuits' SCBD-10-63HP+ high-power bi-directional coupler provides high power handling up to 100W, low mainline loss and good return loss over wideband. Covering frequencies from 50 to 6000 MHz, it supports a wide variety of applications from base station transmit paths to lab use and more. The coupler is designed into an open printed laminate (0.70 x 0.32 x 0.20") with wrap-around terminations for good solderability and easy visual inspection.

## Key Features

Feature	Advantages
Wideband, 50 to 6000 MHz	SCBD-10-63HP+ supports a wide range of system and lab applications.
Low mainline loss, 0.5 dB	Provides excellent through-path signal power transmission.
High power handling, 100W	Usable in systems with a wide range of power requirements.
Excellent return loss, 14-20 dB typ. (input/output/coupling)	Provides excellent matching for 50Ω systems with minimal signal reflection.
Good directivity, up to 18 dB	High directivity allows accurate signal sampling through the coupled port with minimal measurement error.
DC current passing up to 2A	Suitable for use in systems where DC power is needed through the RF line.

### Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# DC Pass, High Power Bi-Directional Coupler

## SCBD-10-63HP+

50Ω Up to 100W 50 to 6000 MHz



CASE STYLE: JB1233-1

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel  
at no extra cost

Reel Size Devices/Reel  
13" 500

### Maximum Ratings

Operating Temperature, case -55°C to 65°C

Storage Temperature -55°C to 100°C

DC Current 2A

\*Case temperature is defined as temperature on ground leads.  
Permanent damage may occur if any of these limits are exceeded.

### Pad Connections

INPUT 1,2,3,4

OUTPUT 2,1,4,3


COUPLED IN 4,3,2,1

COUPLED OUT 3,4,1,2

GROUND 5

### Product Marking: SCBD-02+

### Outline Drawing

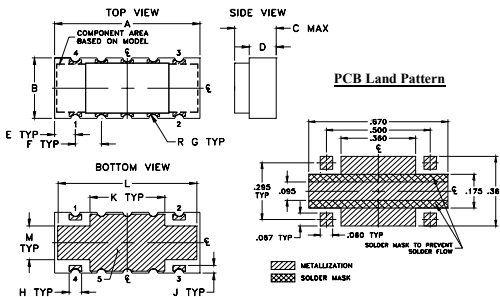

Suggested Layout,  
Tolerance to be within ±.002


### Outline Dimensions (inch/mm)

	A	B	C	D	E	F	G
	.70	.32	.20	.14	.100	.125	.022
	17.78	8.13	5.08	3.56	2.54	3.18	0.56
	H	J	K	L	M	wt	
	.060	.040	.360	.670	.175	grams	
	1.52	1.02	9.14	17.02	4.45	0.80	

### Demo Board MCL P/N: TB-774A+

### Suggested PCB Layout (PL-423)\*\*

\*\* Wraparound solder on ground pins may not be shown

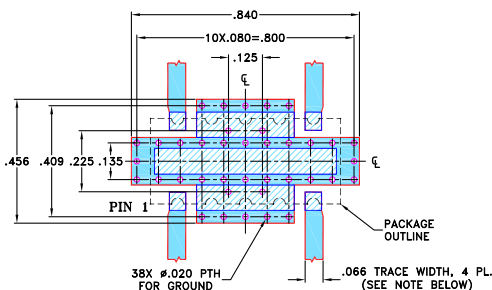

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030"±.002"; COPPER: 1/2 OZ. EACH SIDE.  
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Features

- wide frequency range, 50 to 6000 MHz
- low insertion loss 0.4dB typ. exclude the coupling loss
- good return loss
- high power, up to 100W
- DC current pass through input to output

### Applications

- cellular
- lab use
- WiMax
- PCN
- GSM
- ISM


### Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Units
<b>Frequency Range</b>		50		6000	MHz
<b>Mainline Loss<sup>1</sup></b>	50 - 3500	—	0.5	0.7	dB
	3500 - 6000	—	0.9	1.2	
<b>Coupling</b>	50 - 400	—	36±12	—	dB
	400 - 800	—	24.0±4	—	
	800 - 1000	—	19.6±1.5	—	
	1000 - 1700	—	17±2.8	—	
	1700 - 2000	—	14±1.3	—	
	2000 - 2700	—	13±1.5	—	
	2700 - 3500	—	11.2±1.3	—	
<b>Coupling Flatness (±)</b>	1700 - 2000	—	0.4	0.9	dB
	2700 - 3500	—	0.7	1.0	
	3500 - 6000	—	0.5	0.9	
<b>Directivity</b>	50 - 2000	16	18	—	dB
	2000 - 3500	15	17	—	
	3500 - 4200	12	15	—	
	4200 - 6000	9	12	—	
<b>Return Loss (Input)</b>	50 - 3500	20	30	—	dB
3500 - 6000	14	20	—		
<b>Return Loss (Output)</b>	50 - 3500	20	30	—	dB
3500 - 6000	14	20	—		
<b>Return Loss (Coupling)</b>	50 - 3500	20	30	—	dB
	3500 - 6000	14	20	—	
<b>Input Power<sup>2</sup></b>	50 - 1000	—	—	100	W
	1000 - 2700	—	—	75	
	2700 - 6000	—	—	50	

1. Include coupling loss.

2. At 25°C with no DC. Derate linearly to 75W (50-1000 MHz), 50W (1000-2700 MHz) and 25W (2700-6000 MHz) at 65°C

### Electrical Schematic

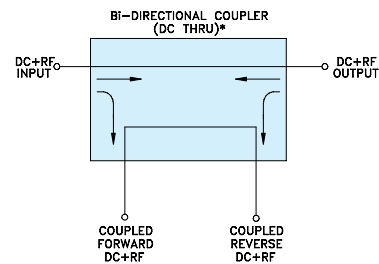

\* ELECTRICAL SCHEMATIC IS FOR BI-DIRECTIONAL COUPLER WITHOUT INTERNAL TRANSFORMERS AND RESISTORS.






[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B  
M157660  
ED-1502181  
SCBD-10-63HP+  
WP/CP/AM  
160105  
Page 2 of 3

## Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)		Coupling (dB)		Directivity (dB)		Return Loss (dB)		
	In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev
50.0	0.04	45.01	45.00	18.73	18.90	57.49	51.49	58.12	52.62
100.0	0.05	38.99	38.98	18.60	18.56	45.83	48.55	49.01	51.54
400.0	0.05	26.99	26.99	18.87	18.88	46.06	42.73	49.68	43.75
500.0	0.06	25.07	25.07	18.86	18.86	37.23	39.30	40.50	40.32
700.0	0.08	22.21	22.21	19.12	19.29	33.75	34.64	35.19	34.30
1100.0	0.13	18.44	18.45	19.67	20.19	31.70	31.61	31.33	31.47
1700.0	0.22	15.09	15.08	21.45	21.05	39.73	40.87	36.16	39.65
2100.0	0.29	13.64	13.63	21.76	20.87	38.05	47.20	32.43	41.40
2700.0	0.44	12.04	12.08	18.39	18.73	40.95	47.89	37.19	35.47
3500.0	0.53	10.69	10.72	16.14	17.03	39.60	34.12	38.68	29.62
4300.0	0.74	9.92	9.92	14.02	13.51	23.44	23.29	25.04	26.17
5100.0	0.77	9.77	9.80	12.78	12.98	22.83	22.64	19.39	18.80
5500.0	0.83	9.86	9.99	12.86	13.30	20.81	20.66	18.91	18.82
5900.0	0.90	10.03	10.20	11.13	11.57	16.78	16.75	16.91	17.23
6100.0	0.97	10.15	10.30	10.22	10.30	14.91	14.86	15.95	15.37

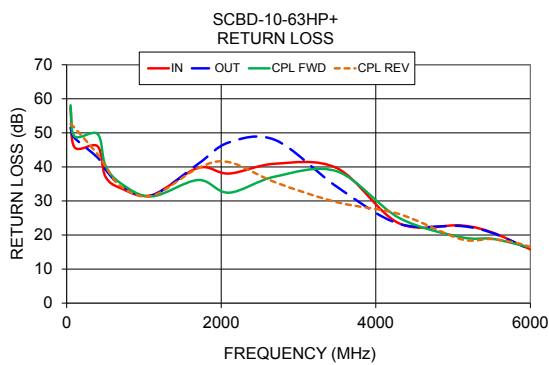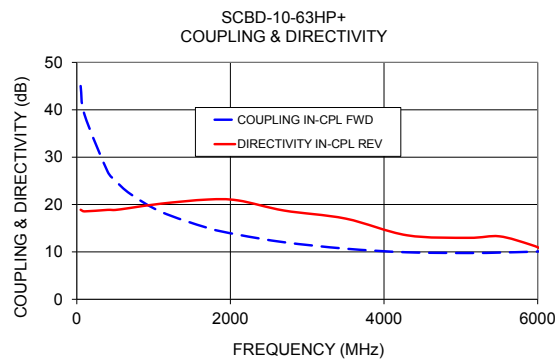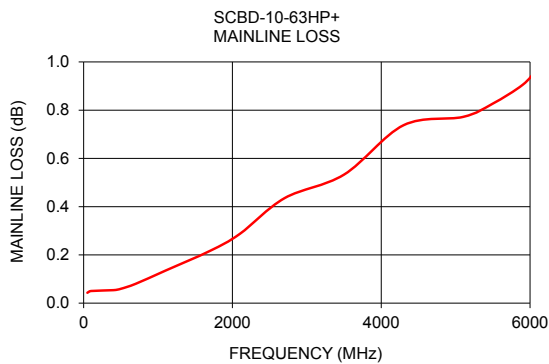

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

