

# Surface Mount Power Splitter/Combiner

## SCPJ-2-750

2 Way-180° 50Ω

30 to 750 MHz



CASE STYLE: YY161  
PRICE: \$27.95 ea. QTY (1-9)

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.125W max.

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

SUM PORT	1
PORT 1	5
PORT 2	6
GROUND	2,3,4,7,8

### Outline Drawing

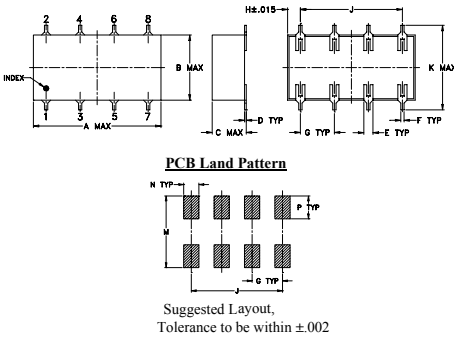


### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
0.75	0.38	0.28	0.01	0.05	0.02	0.2
19.05	9.65	7.11	0.25	1.27	0.51	5.08

H	J	K	M	N	P	wt
0.075	0.6	0.45	0.47	0.1	0.15	grams
1.91	15.24	11.43	11.94	2.54	3.81	1.60

Demo Board MCL P/N: TB-50+  
Suggested PCB Layout (PL-060)

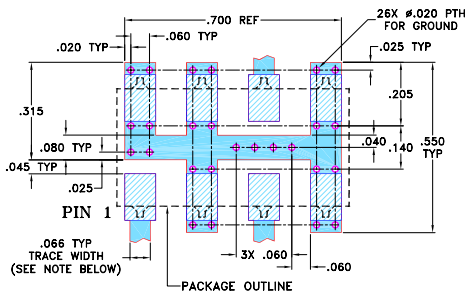

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Features

- wideband, 30 to 750 MHz
- excellent amplitude unbalance, 0.3 dB typ.

### Applications

- VHF/UHF
- receivers/transmitters
- communication systems




### Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 3 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)								
	L	M	U	L	M	U	L	M	U	L	M	U						
30-750	24	18	21	16	20	16	0.7	1.5	1.5	2.2	1.5	2.2	3	4	6	0.8	0.8	0.8

L = low range [ $f_L$  to  $10 f_L$ ]    M = mid range [ $10 f_L$  to  $f_U/2$ ]    U = upper range [ $f_U/2$  to  $f_U$ ]

### Typical Performance Data

Frequency (MHz)	Insertion Loss (dB) S-1	Insertion Loss (dB) S-2	Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
30.00	3.72	3.34	0.38	28.93	180.00	1.08	1.24	1.14
100.00	3.83	3.43	0.40	26.61	179.58	1.11	1.25	1.14
150.00	3.91	3.53	0.37	25.03	179.40	1.15	1.26	1.14
200.00	3.96	3.59	0.37	23.65	179.27	1.18	1.27	1.15
250.00	4.03	3.68	0.36	22.51	179.26	1.22	1.29	1.16
300.00	4.08	3.75	0.33	21.57	179.12	1.25	1.31	1.17
350.00	4.15	3.85	0.30	20.83	179.27	1.29	1.33	1.18
400.00	4.22	3.94	0.28	20.24	179.31	1.32	1.35	1.18
425.00	4.24	3.97	0.27	20.01	179.44	1.33	1.36	1.19
500.00	4.31	4.11	0.21	19.54	179.84	1.36	1.38	1.20
525.00	4.30	4.13	0.16	19.43	170.03	1.37	1.39	1.20
575.00	4.37	4.23	0.14	19.39	180.44	1.37	1.40	1.21
630.00	4.38	4.32	0.06	19.49	179.09	1.37	1.41	1.23
675.00	4.44	4.43	0.01	19.77	178.47	1.36	1.42	1.26
750.00	4.52	4.61	0.10	20.51	177.51	1.33	1.44	1.32

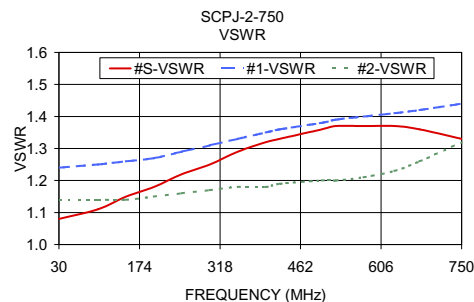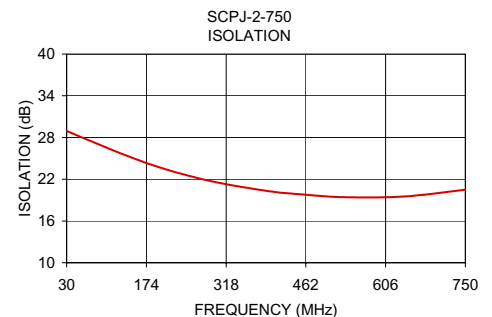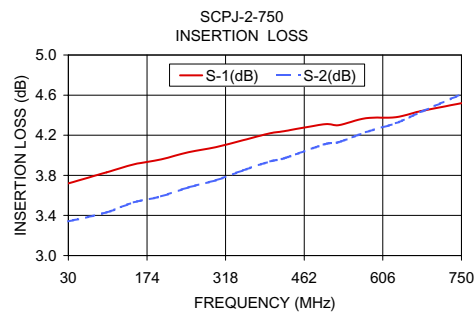

### electrical schematic



**Mini-Circuits®**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site

The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: [www.minicircuits.com](http://www.minicircuits.com)

IF/RF MICROWAVE COMPONENTS

REV. B  
M102713  
SCPJ-2-750  
HY/TD/CP  
070522