

Coaxial

Bandpass Filter

50Ω Constant Impedance 35 to 49 MHz
Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Permanent damage may occur if any of these limits are exceeded.

Features

- low VSWR in pass- and stopbands, 1.3:1 typ
- rugged shielded case
- custom to models available

Applications

- harmonic rejection
- lab use

SIF-40+


CASE STYLE: FF99

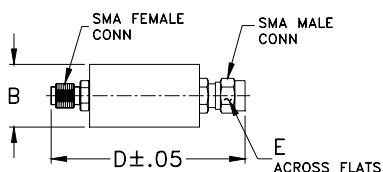

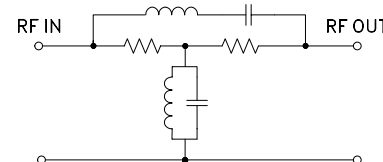
Connectors	Model	Price	Qty.
SMA	SIF-40+	\$38.95 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Bandpass Filter Electrical Specifications

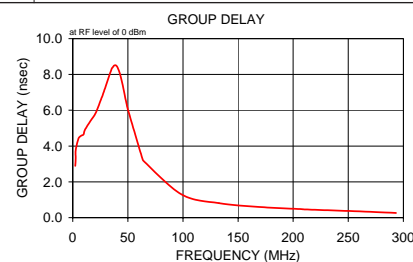
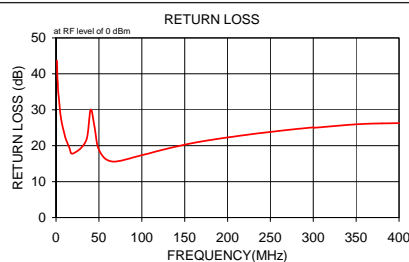
CENTER FREQ. (MHz)	PASSBAND (MHz)	STOPBANDS		VSWR, 1.3:1 Typ. TOTAL BAND (MHz)
		(loss > 10 dB) at MHz	(loss > 20 dB) at MHz	
42	35-49	10 & 168	2.6 & 300	DC-400

Outline Drawing

typical frequency response

electrical schematic

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	\bar{x}	σ			
1.0	31.97	0.1	43.7	2.3	2.895
1.3	29.62	0.1	41.1	2.6	3.319
1.6	27.72	0.1	39.1	2.7	3.755
2.0	26.20	0.1	37.6	5.2	4.422
2.3	24.90	0.1	36.1	7.5	4.574
2.6	23.77	0.1	34.9	9.9	4.649
3.0	22.54	0.1	33.7	11.0	4.904
5.3	17.56	0.1	28.5	16.1	5.402
7.7	14.41	0.1	25.3	20.9	5.852
10.0	12.05	0.1	23.0	26.2	6.700
11.0	11.21	0.1	22.2	27.1	6.840
15.3	8.20	0.1	19.5	35.1	8.288
19.7	5.92	0.1	17.8	36.3	8.399
35.0	0.86	0.1	21.4	37.6	8.498
40.3	0.23	0.1	30.0	39.6	8.488
44.7	0.31	0.1	25.5	41.7	8.249
50.0	0.88	0.1	18.9	43.2	7.937
65.0	3.17	0.1	15.6	45.4	7.393
99.3	7.37	0.2	17.3	47.0	6.910
133.7	10.43	0.2	19.4	48.7	6.395
168.0	12.93	0.3	21.1	50.4	5.956
212.0	15.76	0.3	22.7	63.1	3.323
256.0	18.46	0.4	24.0	64.2	3.167
300.0	21.25	0.5	25.1	98.9	1.296
301.0	21.32	0.5	25.0	132.6	0.812
320.8	22.67	0.6	25.4	168.9	0.599
340.60	24.13	0.7	25.8	207.7	0.474
360.40	25.67	0.9	26.1	211.3	0.462
380.20	27.40	1.1	26.2	255.6	0.363
400.00	29.24	1.4	26.3	293.4	0.264

Outline Dimensions (inch/mm)

B	D	E	wt
.67	1.98	.312	grams
17.02	50.29	7.92	42.0


Mini-Circuits®
 ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine


 Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

 REV. B
 M108294
 SIF-40+
 090821