


# Surface Mount Low Pass Filter

## SXLP-3+

50Ω DC to 3 MHz

### The Big Deal

- Low frequency, DC-3 MHz
- Fast roll-off
- Good VSWR, 1.2:1 typical
- Miniature shielded package



CASE STYLE: HF1139

### Product Overview

SXLP-3+ is a 50Ω lowpass filter fabricated using SMT technology. This lowpass filter covers from DC-3 MHz bandwidth, these units offer good matching within the passband and high rejection. This units uses a miniature high Q capacitors and wire welded inductors for high reliability. In addition it has repeatable performance across production lots and consistent performance across temperature.

### Key Features

Feature	Advantages
Low frequency and fast roll-off	This is a low frequency filter and this will also attenuate frequencies closed to the passband with good rejection value of >20 dB.
Good VSWR, 1.2:1 typical in pass-band	The SXLP-3+ has very good return loss for a low frequency bandwidth and provides good interface when used with other devices.
Small size, 0.44" x 0.74" x 0.27"	The small surface mount package enables the SXLP-3+ to be used in compact designs.



For detailed performance specs  
& shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)


IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

# Surface Mount Low Pass Filter

## SXLP-3+

50Ω DC to 3 MHz



CASE STYLE: HF1139  
PRICE: \$14.95 ea. QTY (1-9)

### Features

- High rejection (30 dB typical)
- Sharp cut-off
- Aqueous washable
- Miniature shielded package

### Applications

- Receivers/transmitters
- Defense communications
- Harmonic rejection

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	DC-F1	DC-3	—	0.8	1.5	dB
	Freq. Cut-Off	F2	3.5	—	3.5	—	dB
	VSWR	DC-F1	DC-3	—	1.2	1.6	:1
Stop Band	Rejection Loss	F3-F4	4.6-800	20	30	—	dB
	VSWR	F3-F4	4.6-800	—	35	—	:1

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W max.

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

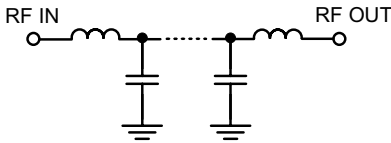

### Typical Frequency Response







### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
0.3	0.07	1.10	0.30	197.09
1.0	0.16	1.24	0.50	197.65
2.3	0.34	1.06	0.60	198.37
3.0	0.66	1.16	0.70	199.16
3.4	1.37	1.30	0.80	199.72
3.5	2.01	1.75	1.00	202.52
3.7	5.07	4.10	1.20	206.51
4.0	13.39	13.60	1.30	209.71
4.4	25.33	30.49	1.50	216.35
4.6	31.09	40.41	1.60	219.74
5.0	42.66	57.91	1.70	224.10
12.0	64.62	434.30	1.80	228.78
48.0	67.17	347.44	1.90	233.71
82.0	63.02	217.15	2.00	238.97
100.0	61.46	173.72	2.20	252.37
250.0	56.13	91.43	2.40	268.63
300.0	53.53	91.43	2.50	278.29
600.0	52.51	72.39	2.70	301.70
700.0	56.57	64.35	2.80	315.66
800.0	58.52	56.04	3.00	355.50

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

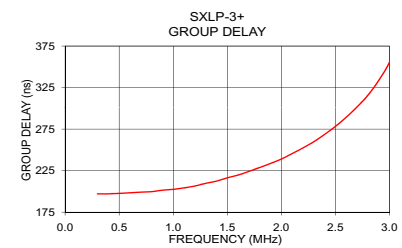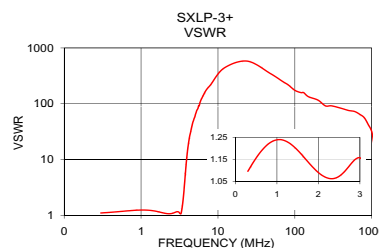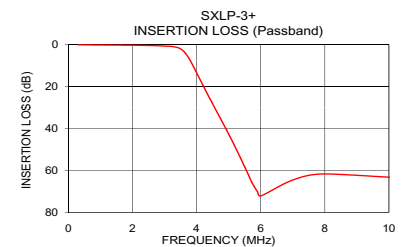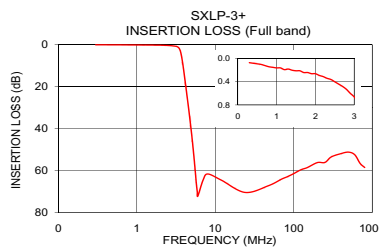

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

For detailed performance specs & shipping online see web site

## Pad Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7

## Demo Board MCL P/N: TB-368 Suggested PCB Layout (PL-230)

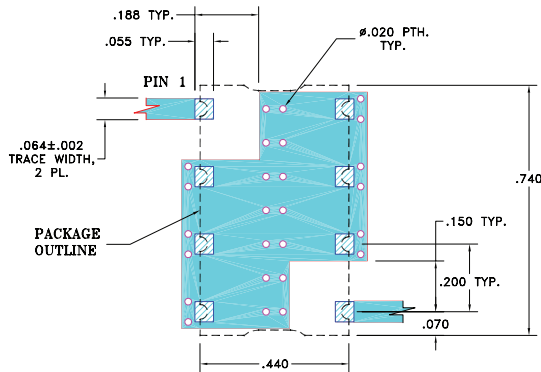


### NOTE:


- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS: .025" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Outline Drawing

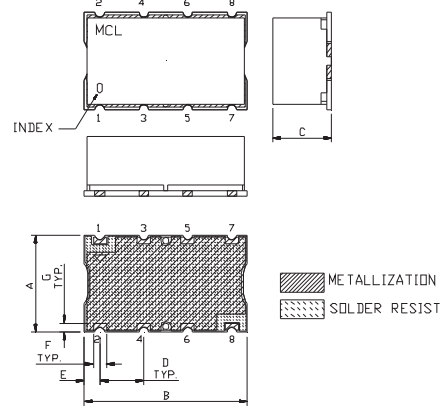

## PCB Land Pattern



## Outline Dimensions (Inch / mm)

A	B	C	D	E	F	G
.44	.74	.27	.200	.07	.060	.040
11.18	18.80	6.86	5.08	1.78	1.52	1.02
H	J	K	L	M		
.660	.200	.470	.055	.060	wt	
16.76	5.08	11.94	1.40	1.52	grams	
					3.0	