

50Ω

1.5 to 600 MHz

TC4-6TG2+**Maximum Ratings**

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Pin Connections

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
SECONDARY CT	2

Features

- suitable for tin/lead and RoHS solder systems
- wideband, 1.5 to 600 MHz
- good return loss
- aqueous washable

Applications

- CATV
- VHF/UHF receivers/transmitters

CASE STYLE: AT224-3

PRICE: \$1.39 ea. QTY (100)

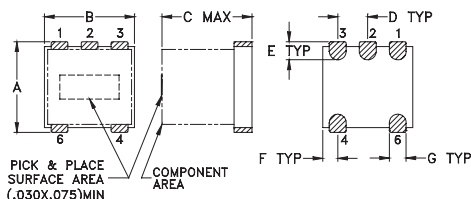

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Transformer Electrical Specifications

Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
4	1.5-600	1.5-600	2-400	3-350

* Insertion Loss is referenced to mid-band loss, 0.6 dB typ.

Outline Drawing AT224-3**PCB Land Pattern**

Suggested Layout,
Tolerance to be within ± 0.002

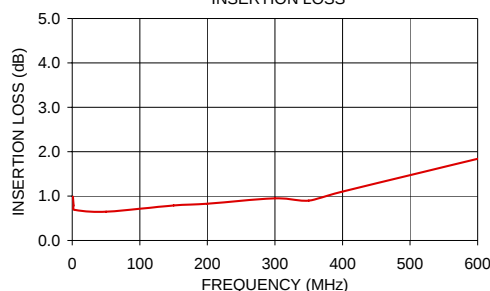
Outline Dimensions (inch)

A	B	C	D	E	F
.150	.150	.150	.050	.030	.025
3.81	3.81	3.81	1.27	0.76	0.64
G	H	J	K	wt	
.028	.065	.190	.030	grams	
0.71	1.65	4.83	0.76	0.10	

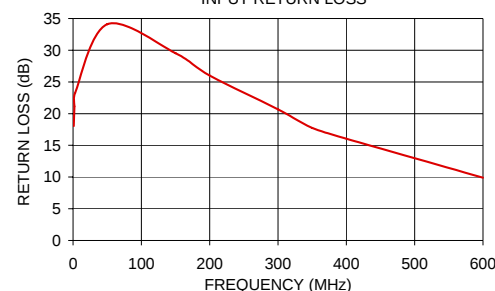

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
1.00	0.99	18.04
2.00	0.79	21.15
3.00	0.69	23.26
50.00	0.65	34.11
150.00	0.79	29.54
200.00	0.83	26.00
300.00	0.95	20.67
350.00	0.90	17.75
400.00	1.10	16.06
600.00	1.84	9.91

TC4-6TG2+
INSERTION LOSS



TC4-6TG2+
INPUT RETURN LOSS

**Config. A**

Mini-Circuits®
ISO 9001 ISO 14001 AS9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
M109760
TC4-6TG2+
IG/QL
080211